

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

Contact : Brass

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$


Ordering Information

8P25S-11 XX XX XXX X 1

No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
1-20 ^a	G=Gold Flash	D=PBT	B: Tape & Reel + CAP	A: PE Bag
	G=1u Gold	C:PAGI	C: Tube	D: Tube
	G=3u Gold	D:UCP	E: Tray	E: Tray
	G=10u Gold		F: Tape & Reel	F: Tape & Reel
	G=15u Gold			
	G=30u Gold			
	P=Gold Flash			
	F=1U Gold/Tin			
	F=3U Gold/Tin			
	F=5U Gold/Tin			
	F=10U Gold/Tin			
	F=15U Gold/Tin			
	F=30U Gold/Tin			
	S=Sn Tin			
	S=Matte Tin			

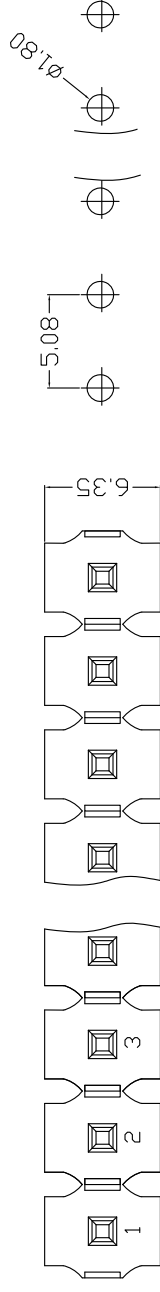

Recommended P.C.B. layout

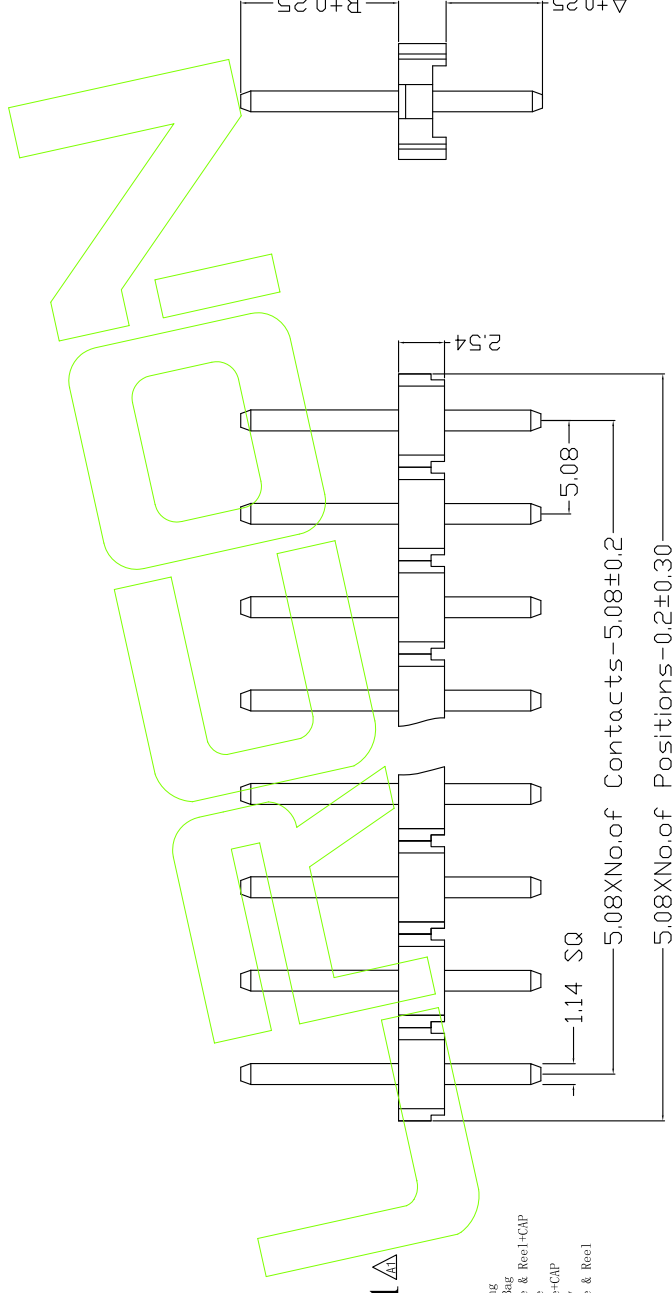

Dimension antitheses lis		
ITEM	A	B
Standard	3.50	4.50
Alternate		

[illegible]