

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F. UL94V-0.Color:Black

Material : Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.


耐电压: AC 500V.

温度范围: -40°C to +105°C


Ordering Information

3PXXS-12 XX XX XXX X 4^A

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
Height		G=Gold	Flash	A: PBT		A: PPE Bag
10: ±1.0	1-40 ^o	G=1u	Gold	B: PBT		B: Tape & Reel-CAP
15: ±1.5		G=5u	Gold	C: PBT		C: Tube
17: ±1.7		G=5u	Gold	D: LCP		D: 1uiber-CAP
20: ±2.0		G=10u	Gold			E: Tray
25: ±2.5		G=15u	Gold			F: Tape & Reel
30: ±3.0		G=30u	Gold			
		P0=Gold	Flash			
		F1=1u	Gold/Tin			
		F2=3u	Gold/Tin			
		F3=5u	Gold/Tin			
		F4=10u	Gold/Tin			
		F7=15u	Gold/Tin			
		F9=30u	Gold/Tin			
		S0=fin				
		S1=Platte	Tin			



Recommended P. C. B Layout

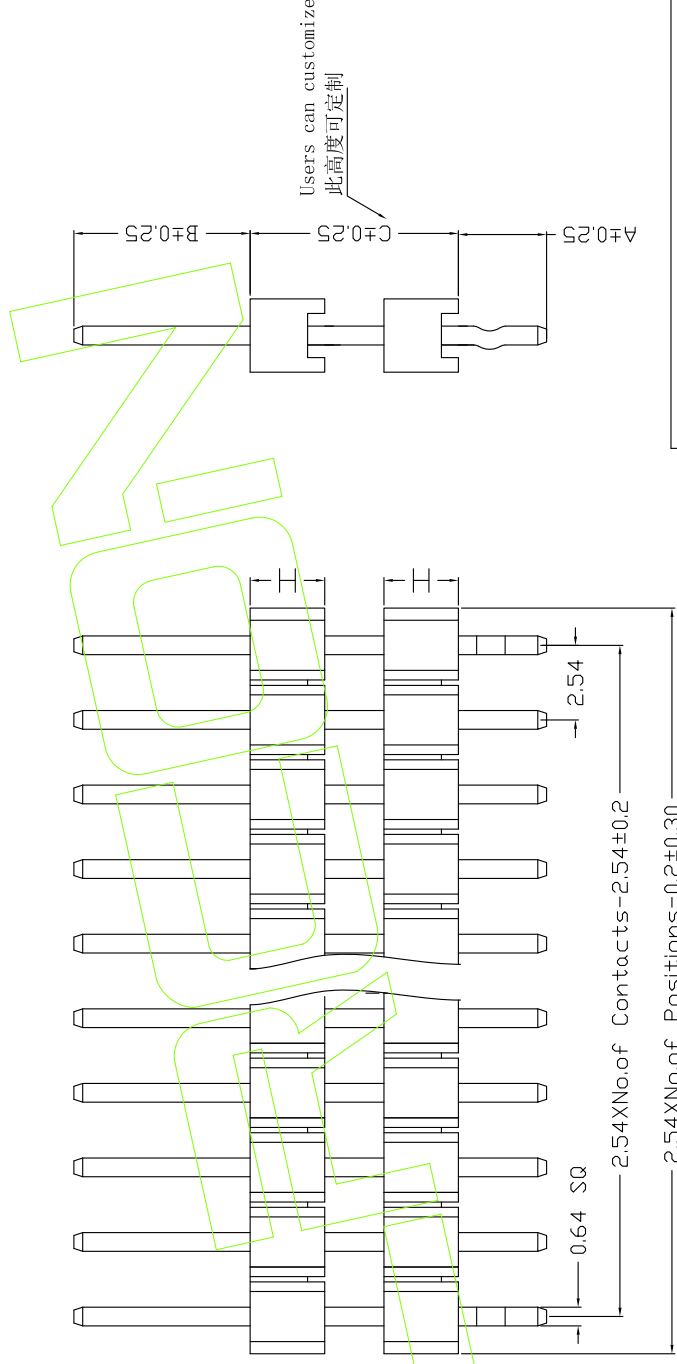

Dimension antitheses list

ITEM	A	B	H			C
Standard	3.0	6.0	1.0	1.5	1.7	2.0 2.54
Alternate						

Zoom

连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX	±0.25	CHECK	罗荣军	SIZE	A4	DESIGN	PART NO.	3PXXS-12XXXXXXXXXX4
A0	12/05/18	NEW	——	——	X.XXX	±0.15	Angle	±3°	SHEET	1/1	CHECK	TITLE:	2.54单排针 双塑 180度 打K
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	