



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜

Contact : Brass

2. 特性 (characteristics):

额定电流: 3 AMP

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

耐压: AC 500V.


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

3PXXM- 11 XX XX X XXX X X2 Δ1

Plastics	No. of Pins	Contact Plating	Insulator Length	Packing
10: #E=1.0	Per Row	Gold Flash	Material of	A: PE Bag
15: #E=1.5	1~40P	G=1u" Gold	B: P801	B: Tape & Reel-CAP
17: #E=1.7		G=3u" Gold	C: P891	C: Tube
20: #E=2.0		G=5u" Gold	D: LCP	D: Tube-CAP
25: #E=2.54		G=10u" Gold		E: Tray
		G=15u" Gold		F: Tape & Reel
		G=30u" Gold		
		Fl=Gold Flash		
		F=10u" Gold/Tin		
		F=30u" Gold/Tin		
		F=50u" Gold/Tin		
		F=100u" Gold/Tin		
		F=150u" Gold/Tin		
		F=300u" Gold/Tin		
		Sn=Fin		
		Sn=Matte Tin		

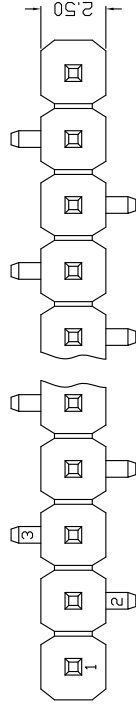

TYPE A

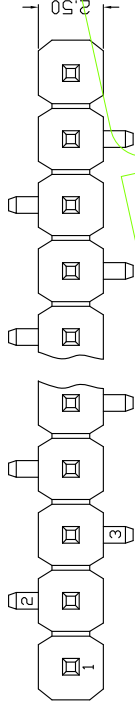


TYPE B



CAP

Recommended P.C.B layout

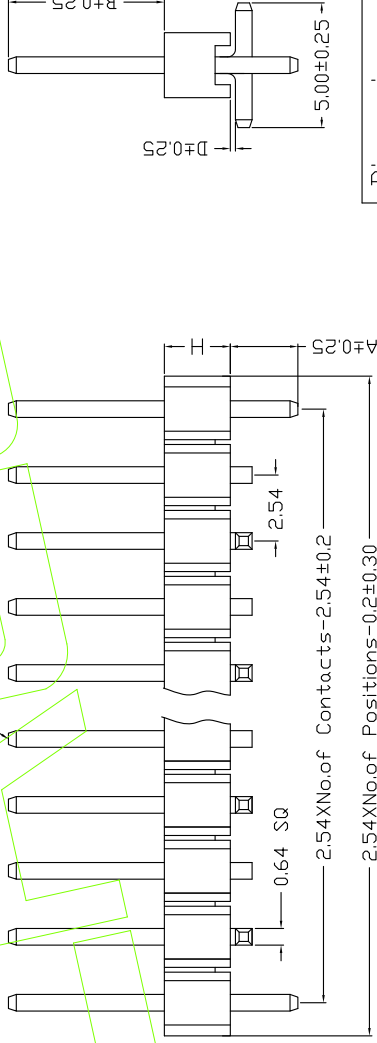

Dimension antitheses list

ITEM	A	B	H	D
Standard	3.0	6.0	1.0	1.5
Alternate				

LARCON 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3PXXM-11XXXXXXX2
TITLE:	2.54单排针 SMT 两边带定位针
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	LIANR	20/06/09	SCALE	UNIT	Fit
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ1	张涛	X.XX	±0.40			DESIGN	张涛				
A0	12/05/18	NEW			X.XX	±0.25			CHECK	罗荣军				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	LIANR	20/06/09	SCALE	UNIT	Fit