

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F UL94V-0.Color:Black

Material: Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.


耐电压: AC 500V.

温度范围: -40°C to +105°C

Ordering Information

3pYVR- 11 YV Y VY Y 2A

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
Height	1.40"	Gold/Flash		A: PBT		A: Tape Bag
10: ± 1.0		G=3u" Gold		B: PBT		B: Tape & Reel+CAP
13: ± 1.5		G=5u" Gold		C: PBT		C: Tube
17: ± 1.7		G=10u" Gold		D: LCP		D: Tube+CAP
20: ± 2.0		G=15u" Gold				E: Tray
22: ± 2.2		G=30u" Gold				F: Tape & Reel
25: ± 2.54		PO-Gold Flash				
		F1=1U" Gold/Tin				
		F2=3U" Gold/Tin				
		F3=5U" Gold/Tin				
		F4=10U" Gold/Tin				
		F7=15U" Gold/Tin				
		F9=30U" Gold/Tin				
		S=5in				
		S=6in Matte Tin				

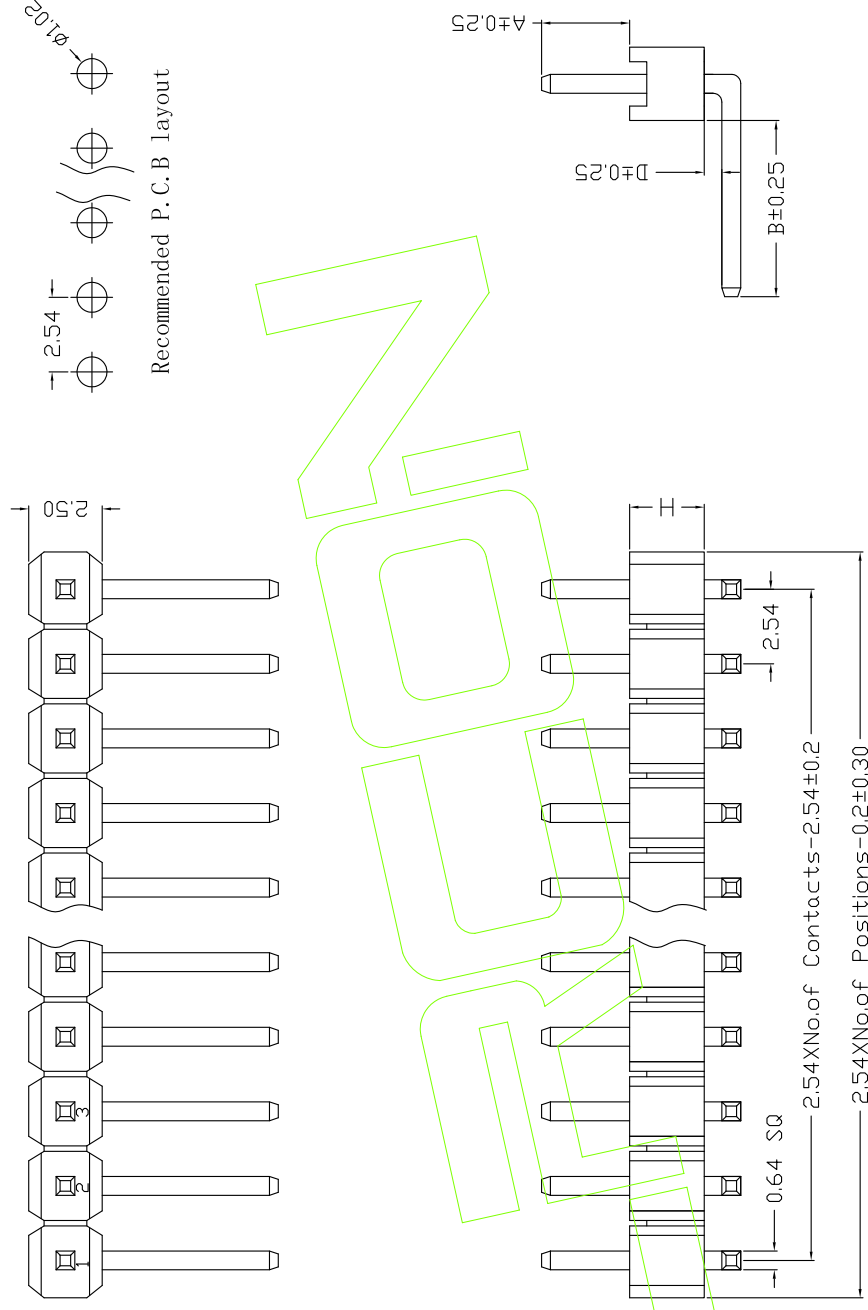

Dimension antitheses list

[illegible][illegible]