



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Material: Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

耐电压: AC 500V.
Withstanding Voltage: AC 500V.



温度范围: -40°C 到 $+105^{\circ}\text{C}$

温度范围: -40°C 到 $+105^{\circ}\text{C}$
Temperature Range: -40°C


temperature range. 40°C to 105°C

Ordering Information

3PXXS-11 XX XX XX XX X

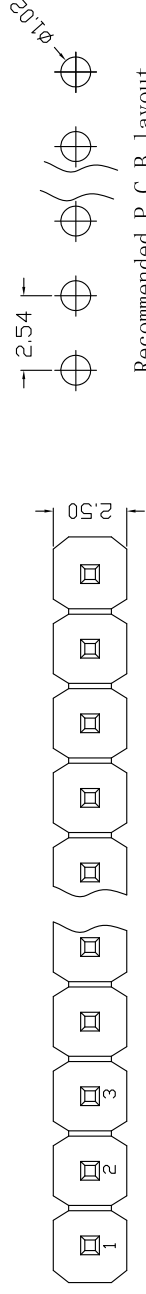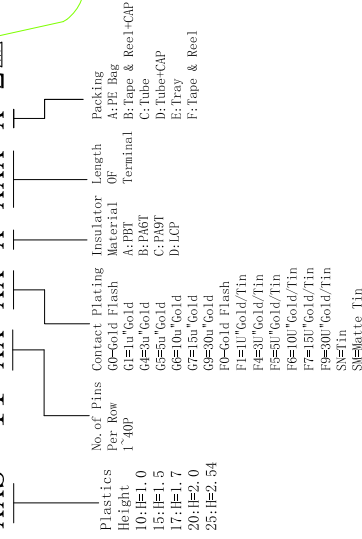

Recommended P.C.B. layout

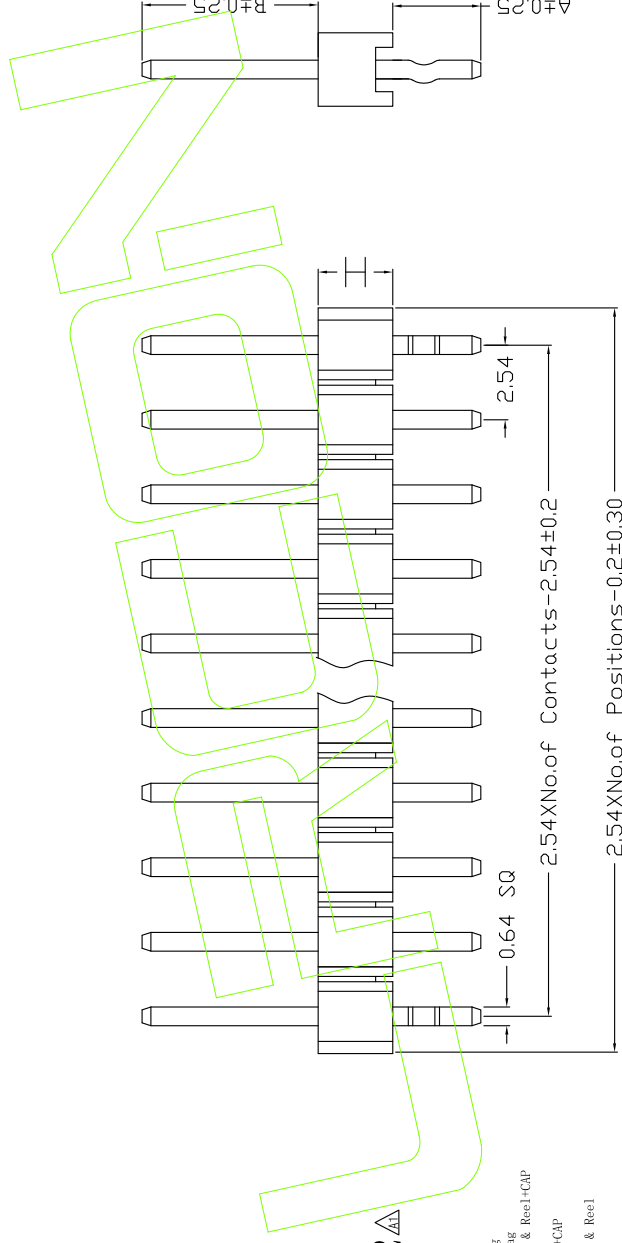

Dimension antitheses list

ITEM	A	B	H				
Standard	3.0	6.0	1.0	1.5	1.7	2.0	2.54
Alternate							

[illegible]