

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针：黄铜

Contact : Brass

2. 特性 (characteristics):

Z: 付江 (characteristics):
额定电流: 2 AMP

额定电压: 2 AMP
Rating Current: 2 AMP

Rating current: 20 mA MAX
接觸阻抗: 20 mΩ MAX

按触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

边缘阻抗: 1000 MΩ·min

绝缘阻抗: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min

耐电压: AC 500V



耐压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -10°C to $+105^{\circ}\text{C}$


温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

Ordering Information

2p207-21 XX XX XXX X 3^{A1}

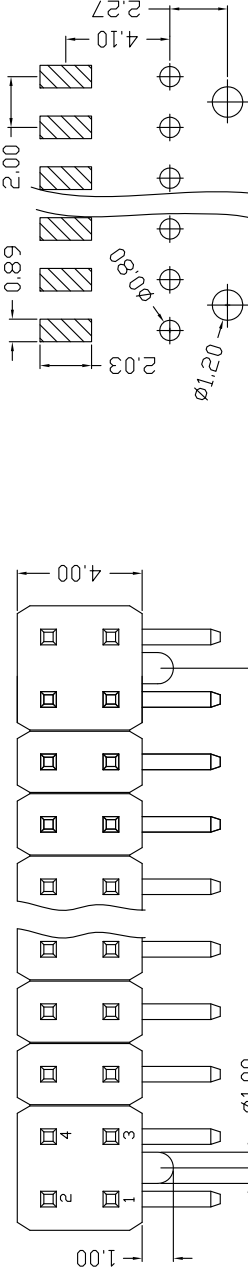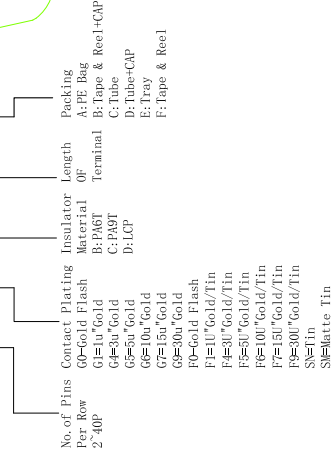

Recommended P.C.B layout

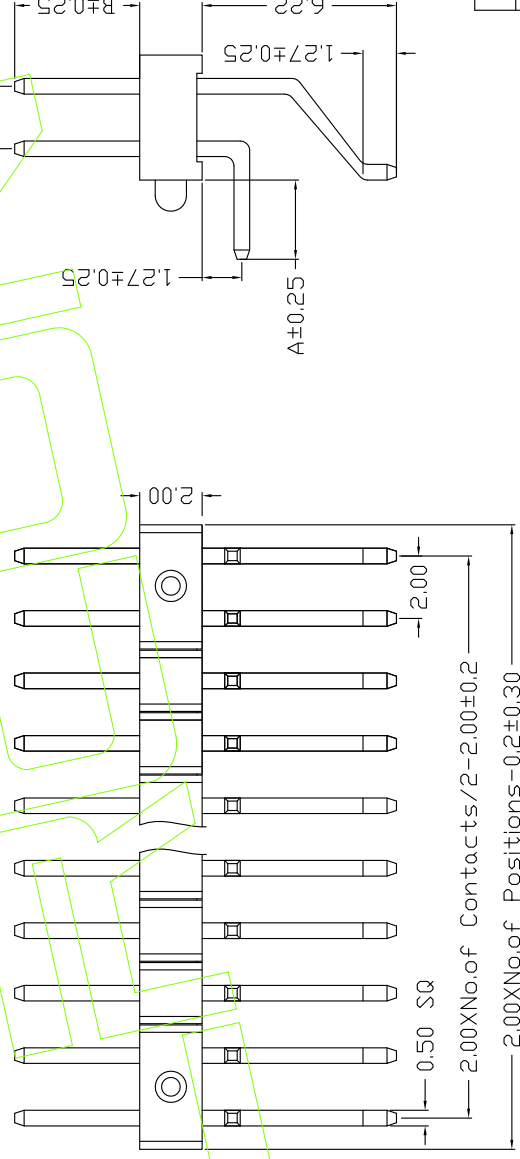

Dimension antitheses list		
ITEM	A	B
Standard	2.50	4.0
Alternate		

[illegible]