

HSF RoHS

1. 材料(MATERIAL)

- 胶芯: PA6T+30%GF UL94V-0, 颜色: 黑色

四方针：黄铜

2. 特性 (characteristics):

额定电流: 2 AMP

接触阻抗: 20 mΩ MAX.



绝缘阻抗: 1000 M Ω min.

耐电压: AC 500V.


温度范围: -40°C to +105°C

Ordering Information

2P207-21 XX XX XXX X 1

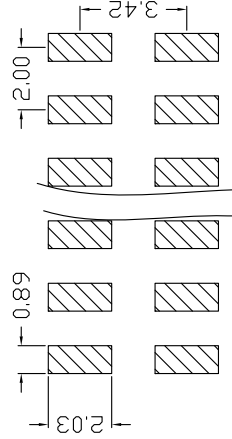

Recommended P.C.B layout

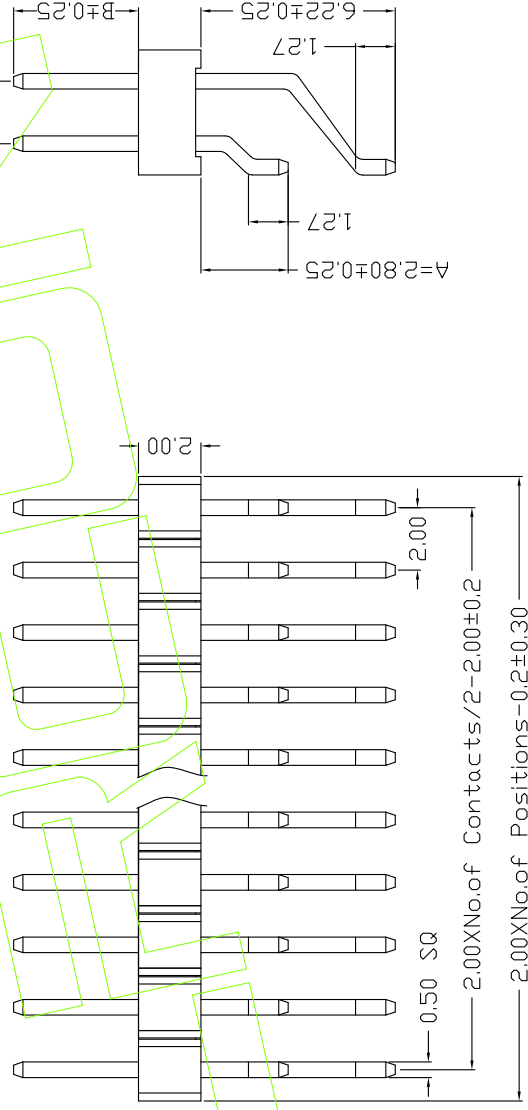

Dimension antitheses list		
ITEM	A	B
Standard	2.80	4.0
Alternate		

[illegible]