



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜

Contact : Brass

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

2PXXM- 12 XX XX X XXX X X Δ

Plastics	No. of Pins	Contact Plating	Insulator Length	Packing	A: TYPE A
10: 101.0	Per Row	G=Gold Flash	Material of	A: PE Bag	B: TYPE B
15: 151.5		G=1u"Gold	B: P601	B: Tape & Reel-CAP	
20: 152.0		G=3u"Gold	C: P601	C: Tube	
		G=5u"Gold	D: LCP	D: Tube-CAP	
		G=10u"Gold		E: Tray	
		G=15u"Gold		F: Tape & Reel	
		G=30u"Gold			
		P=Gold Flash			
		P=10"Gold/Tin			
		P=30"Gold/Tin			
		P=50"Gold/Tin			
		P=100"Gold/Tin			
		P=150"Gold/Tin			
		P=300"Gold/Tin			
		Sn=Fin			
		Sn=Matte Tin			

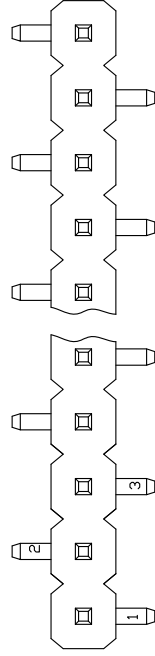


TYPE A

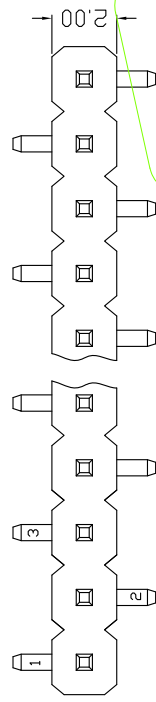

TYPE B

Recommended P.C.B layout

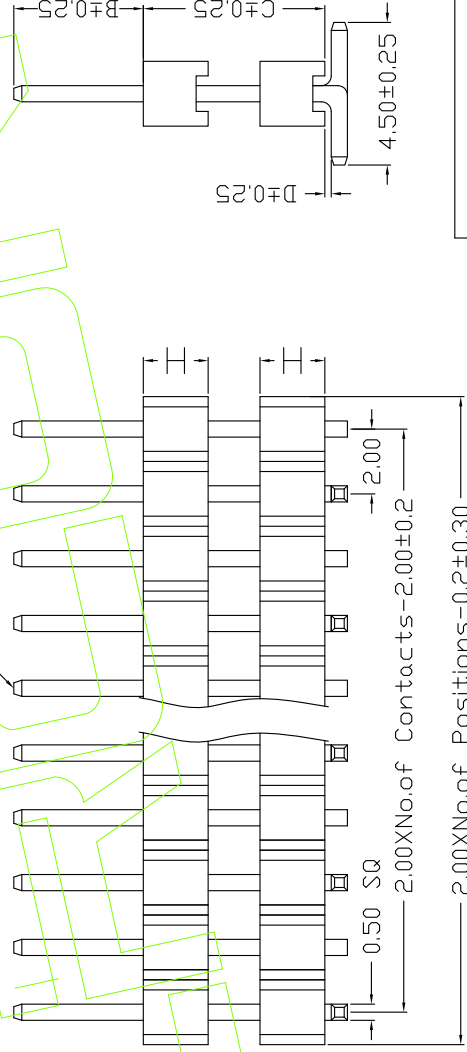

Users can customize
此高度可定制

Dimension antitheses list

ITEM	B	H	D	C
Standard	2.8	4.0	1.0	1.5 2.0 0 0.75
Alternate				

LARCON 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	2PXXM-12XXXXXXX
TITLE:	2.0单排针 双塑 SMT
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		OPERATION	DRAW	LI	ANR	20/06/09	SCALE	Fit	
									X.X ±0.40					UNIT	MM	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	△	张涛	X.XX	±0.25	张涛			DESIGN	张涛					
A0	12/05/18	NEW	—	—	X.XXX	±0.15	—			CHECK	罗荣军			SHEET	CHECK	
					Angle	±3°				APPROVE	方里军			PROJ.	APPROVE	