


temperature range: 40 to 120 °C

2PXXR-21 XX X XXX X 2_{A1}

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
Height		GO-Gold	Flash	A: PBT		A: PE Bag
10: ± 1.0	2-40 ⁰	G=1u"Gold		B: PBT		B: Tape + Reel + CAP
15: ± 1.5		G=3u"Gold		C: PBT		C: Tube
20: ± 2.0		G=5u"Gold		D: LCP		D: Tube-CAP
		G=10u"Gold				E: Tray
		G=15u"Gold				F: Tape + Reel
		G=30u"Gold				
		FO-Gold	Flash			
		F=1U"Gold/Tin				
		F=3U"Gold/Tin				
		F=5U"Gold/Tin				
		F=10U"Gold/Tin				
		F=15U"Gold/Tin				
		F=30U"Gold/Tin				
		Sn=Tin				
		Sn=Matte Tin				

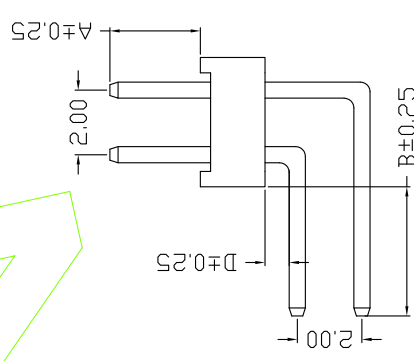

Dimension antitheses list						
ITEM	A	B	H		D	
Standard	2.8	4.0	1.0	1.5	2.0	0
Alternate						0.75

[illegible]