



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact : Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

接触电阻: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

1P16L- 21 XX XX X XXX X 2△

No. of Pins	Contact Plating	Insulator Material	Length	Packing
230P	Q=Gold Flash	M=PA6T	90°	A:PE Bag
	G=10" Gold	R=PA6T	Terminal	B: Tape & Reel+CP
	G=30" Gold	C=PA9T		C: Tube
	G=50" Gold	D=LCP		D: Tray
	G=100" Gold			E: Tray
	G=150" Gold			F: Tape & Reel
	G=300" Gold			
	P=Gold Flash			
	F=10" Gold/Tin			
	F=30" Gold/Tin			
	F=50" Gold/Tin			
	F=100" Gold/Tin			
	F=150" Gold/Tin			
	F=300" Gold/Tin			
	Sn=Tin			
	Sn=Matte Tin			

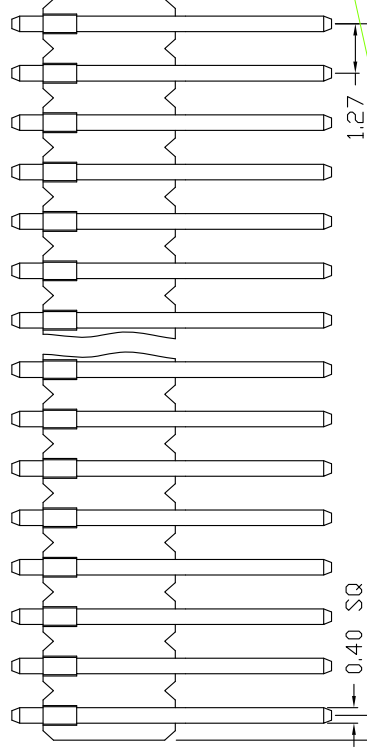

Recommended P.C.B layout

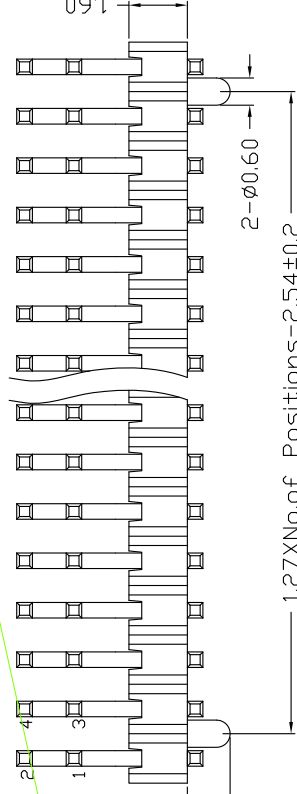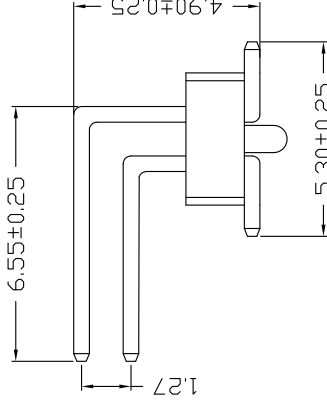

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	方里军	罗荣军	张涛	DESIGN	UNIT	Fit	MM	SCALE	SIZE	A4	CHECK	DESIGN	PART NO.	1P16L-21XXXXXXX2	TITLE:	1.27双排针 塑高1.6 90度SMT 带柱	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	△	张涛	X.X	±0.40																			
A0	12/05/18	NEW			X.XX	±0.25																			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	方里军	罗荣军	张涛	DESIGN	UNIT	Fit	MM	SCALE	SIZE	A4	CHECK	DESIGN	PART NO.	1P16L-21XXXXXXX2	TITLE:	1.27双排针 塑高1.6 90度SMT 带柱	Customer No.