

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

Ordering Information

4PXXR-21 XX XX XX X 1

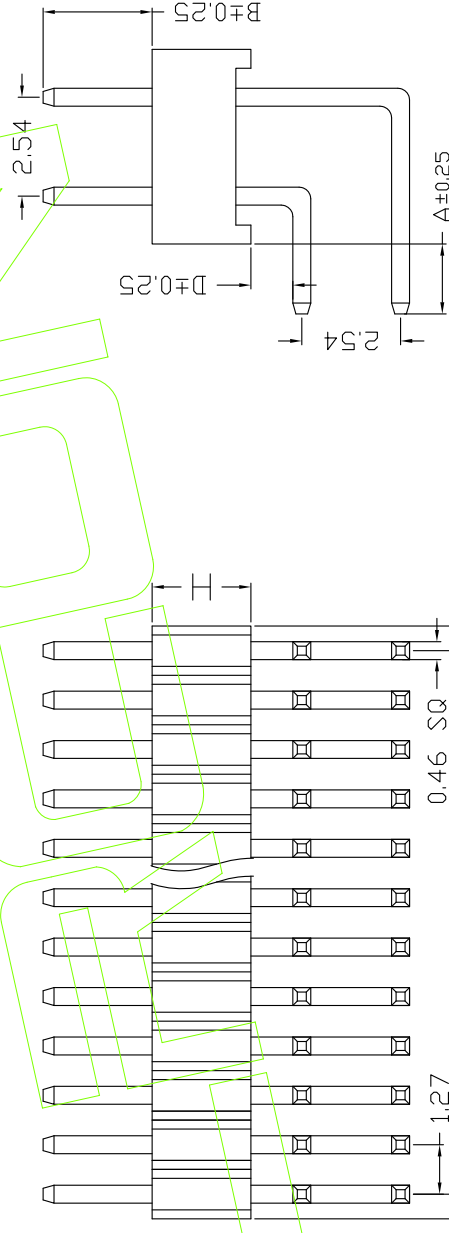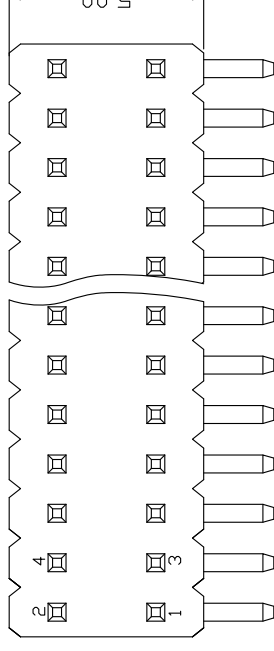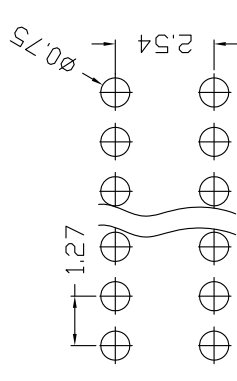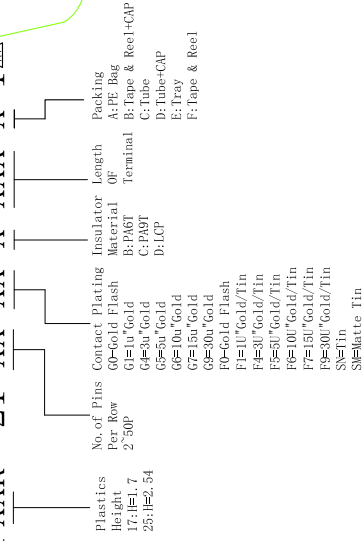

Dimension antitheses list						
ITEM	A		B		D	H
Standard	1.8	2.8	2.8	6.0	0	1.2 1.7 2.54
Alternate						

[illegible]