

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色。

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针: 黄铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

额定电压: 1 AMV
Rating Current: 1 AMP.

接觸阻抗: 20 mΩ MAX.

按电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.




耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

Ordering Information

4PXXS-22 XX XX XXX X 2_{AT}

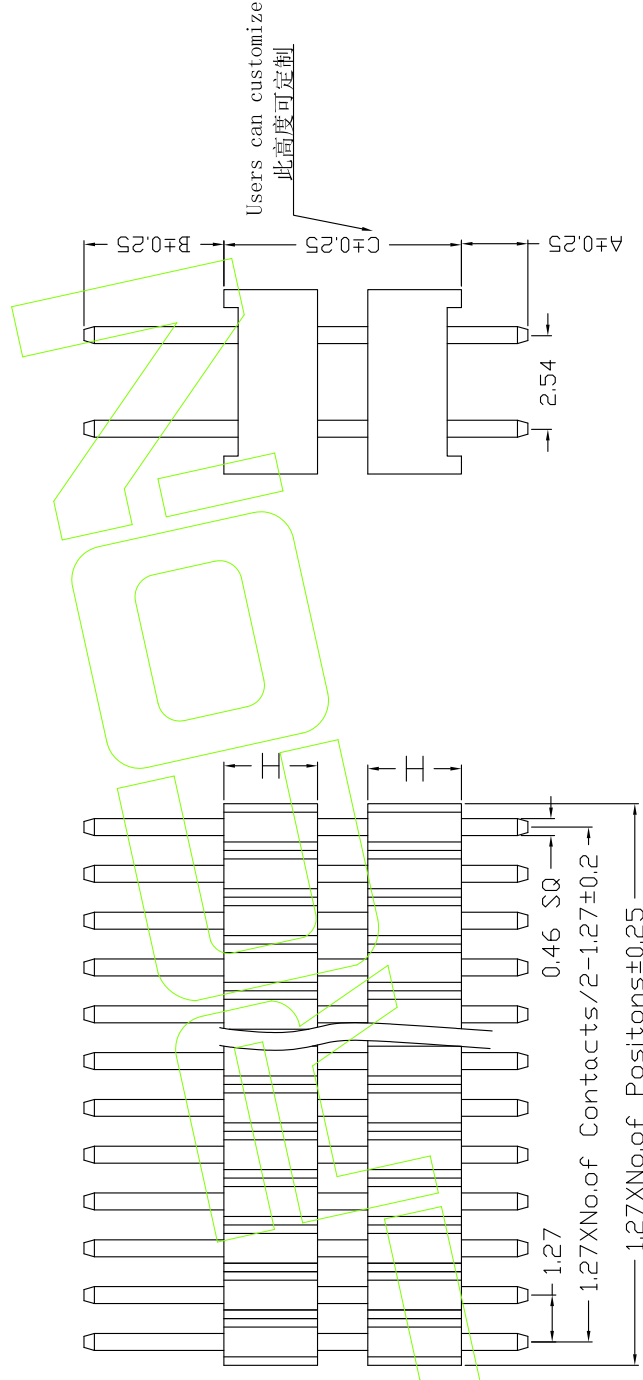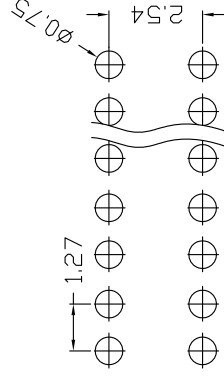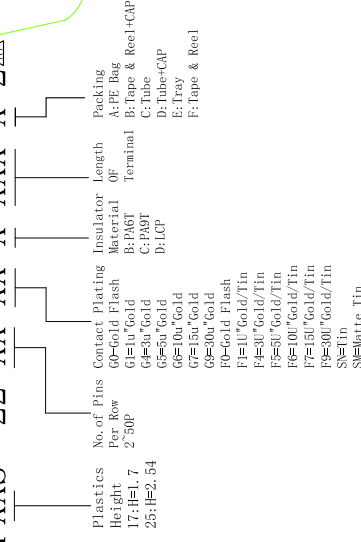

Dimension antitheses list					
ITEM	A		B		C
Standard	1.8	2.8	2.8	6.0	1.7 2.54
Alternate					

[illegible]