

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: LCP+30%G.F UL94V-0,Color: Black

端:黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 1000V.



Withstanding Voltage: AC 1000V.

温度范围: -40°C to $+105^{\circ}\text{C}$



Temperature Range: -40°C to +105°C

Ordering Information

8F89M- 11 XX XX X U X 1 $\triangle_{A1}$

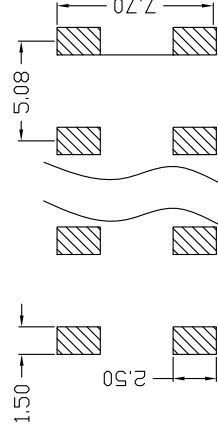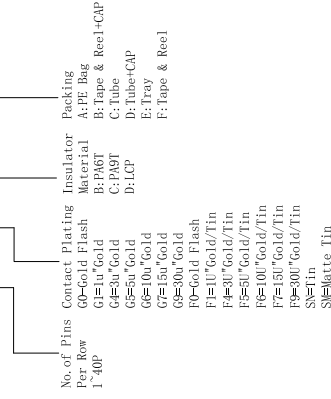

Recommended P.C.B layout

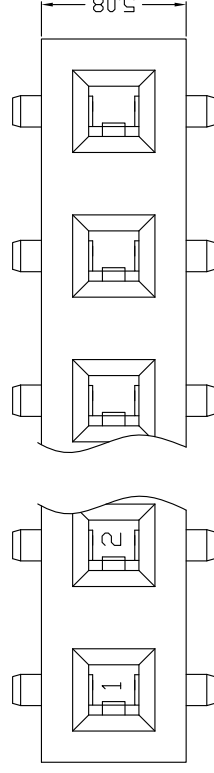[illegible]