



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PBT/PA6T+30%G.F UL94V-O, 颜色: 黑色.

Housing: PBT/PA6T+30%G.F UL94V-O, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

3F85S- 21 XX XX X Y X 1 Δ

No. of Pins Per Row 2~40P	Contact Plating Material	Insulator Material	Packing
G=10" Gold	A: PBT	A: PPE Bag	A: PPE Bag
G=30" Gold	B: PBT	B: Tape & Reel-CAP	B: Tape & Reel-CAP
G=50" Gold	C: PBT	C: Tube	C: Tube
G=100" Gold	D: PBT	D: Tube-CAP	D: Tube-CAP
G=150" Gold	E: PBT	E: Tray	E: Tray
G=300" Gold	F: PBT	F: Tape & Reel	F: Tape & Reel
P0=Gold Flash			
F=10" Gold/Tin			
F=30" Gold/Tin			
F=50" Gold/Tin			
F=100" Gold/Tin			
F=150" Gold/Tin			
F=300" Gold/Tin			
Sn=Tin			
Sl=Matte Tin			

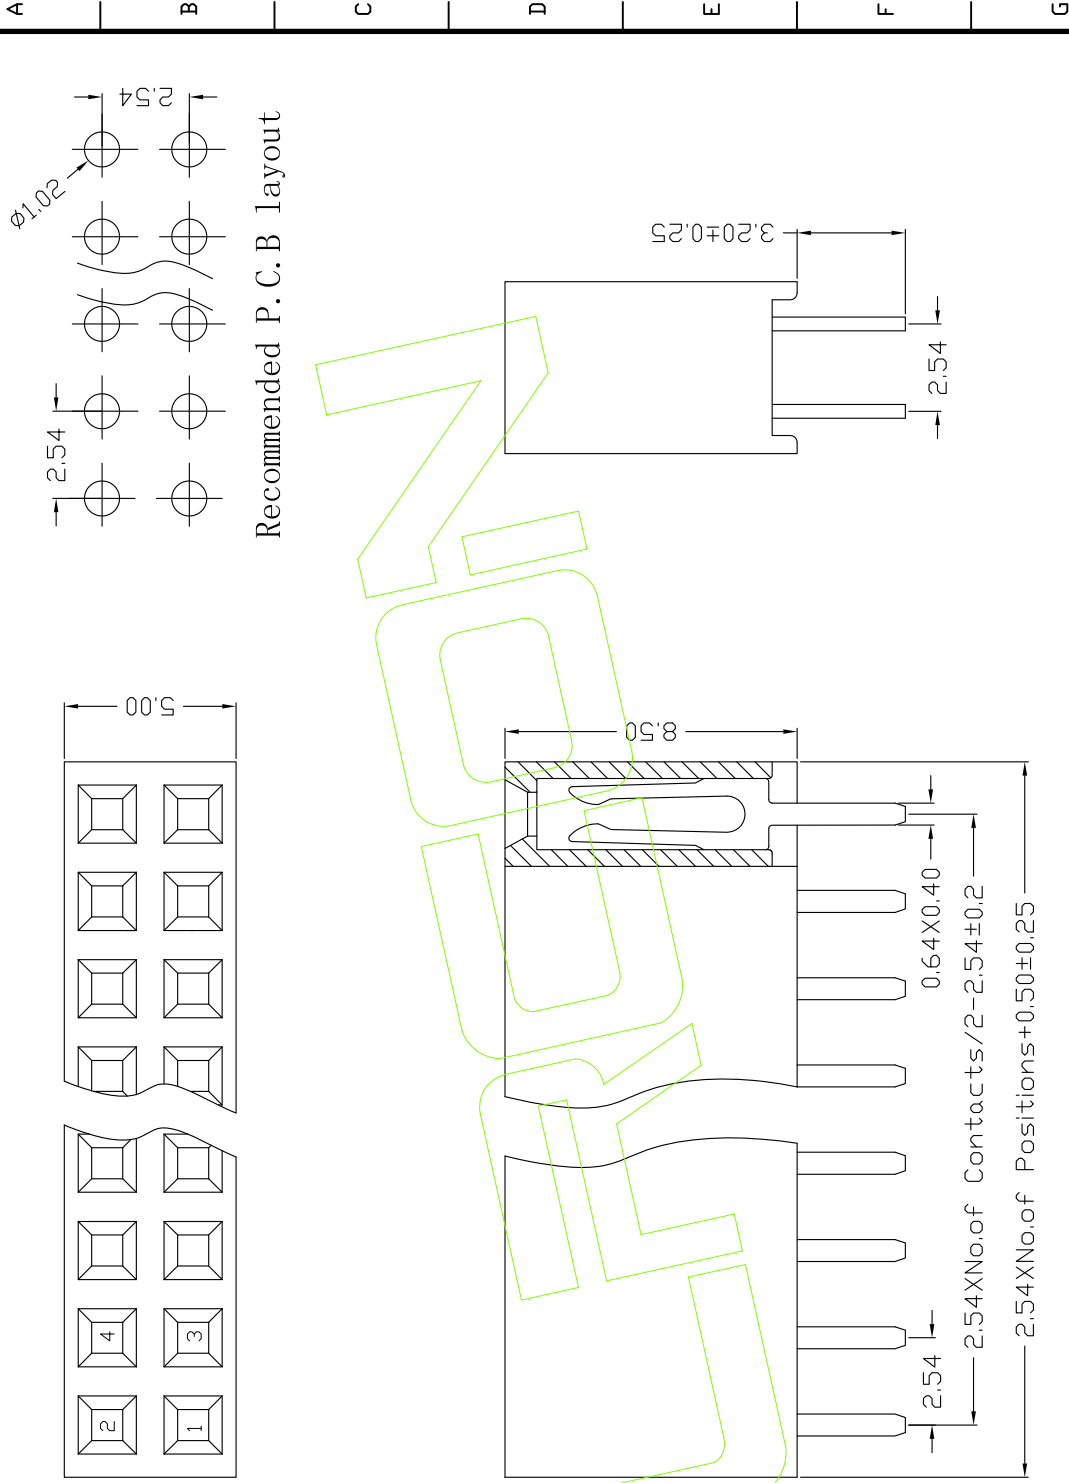

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	OPERATION		DRAW	LI	ANR	20/06/09	SCALE		Fit	H			
								X.X	± 0.40					UNIT	MM		PART NO.	TITLE:	Customer No.	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.XX	± 0.25	DESIGN	张涛	DESIGN	张涛	张涛	张涛	张涛	A4	DESIGN	DESIGN	3F85S-21XXXXXX1			
A0	12/05/18	NEW	—	—	X.XXX	± 0.15	CHECK	—	CHECK	罗荣军	罗荣军	罗荣军	罗荣军	1/1	CHECK	CHECK		2.54双排母 塑高8.5 180度 Y型		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Angle	$\pm 3^\circ$	APPROVE	APPROVE	APPROVE	APPROVE	PROJ.	APPROVE	APPROVE				