



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

3F45S- 21 XX XX X Y X 1 Δ

No. of Pins Per Row 2/40P	Contact Plating G=10" Gold G=30" Gold G=50" Gold G=100" Gold G=150" Gold G=300" Gold F=10" Gold/Tin F=30" Gold/Tin F=50" Gold/Tin F=100" Gold/Tin F=150" Gold/Tin F=300" Gold/Tin Sn=Fin Sn=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	---	---	---

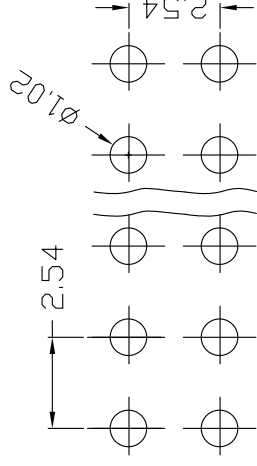

Recommended P.C.B layout

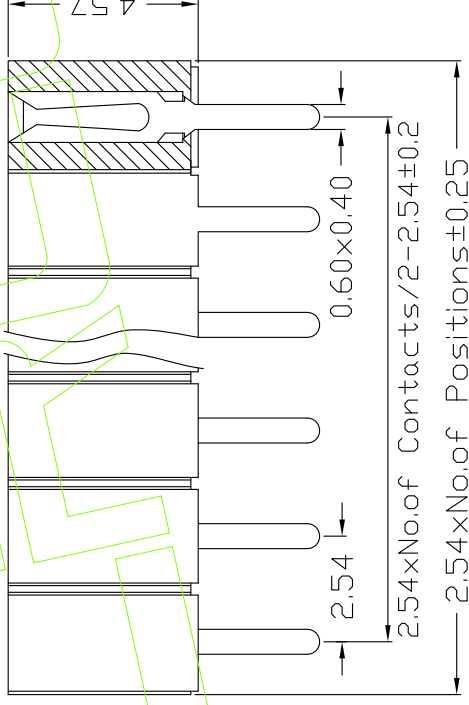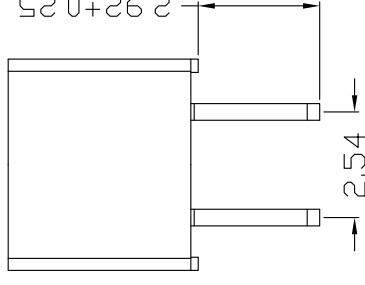

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3F45S-21XXXXXX1
TITLE:	2.54双排母 塑高4.5 180度 Y型
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LI	IANR	20/06/09	SCALE		Fit	H	
							X.X	±0.40					UNIT	MM		DESIGN	DESIGN
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.XX	±0.25			DESIGN	张涛							
A0	12/05/18	NEW			X.XXX	±0.15			CHECK	罗荣军							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°			APPROVE	方里军							