

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

額定電流: 3 AMP

锁走电压: 3 AMI
Rating Current: 3 AMP.

接觸阻抗: 20 mΩ MAX

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

绝缘电阻: 1000 MΩ 1min.
Insulating Resistance: 1000 MΩ min.

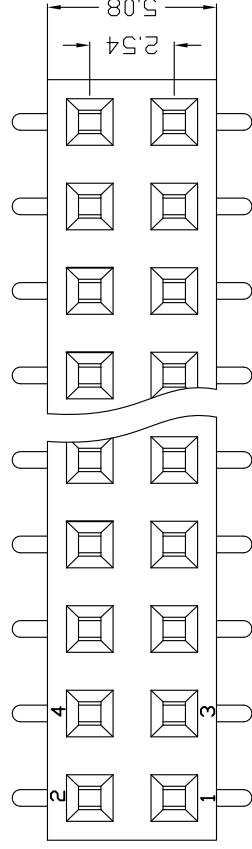

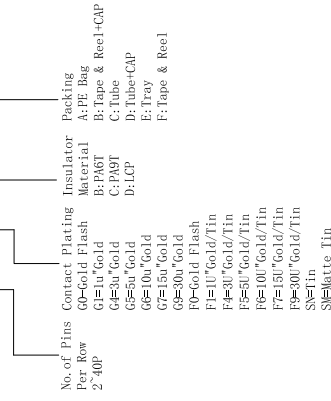
耐电压: AC 500V.

耐电压: AC 500V.
Withstanding Voltage: AC 500V.


温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C 到 $+105^{\circ}\text{C}$
Temperature Range: -40°C

Ordering Information

3F35W-21 XX XX X U X 1 Δ_{A1} 

Recommended P.C.B. layout

[illegible]