

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX;

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

绝缘电阻: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

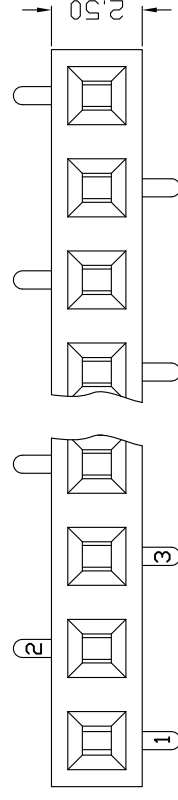
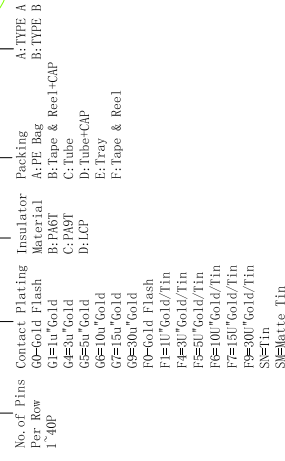
Withstanding Voltage: AC 500V.

溫度範圍: -40°C to +105°C

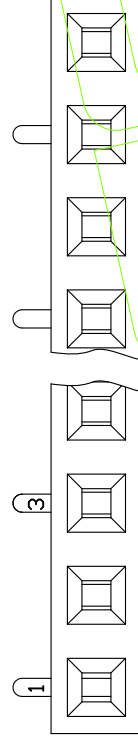
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: -40°C to 100°C

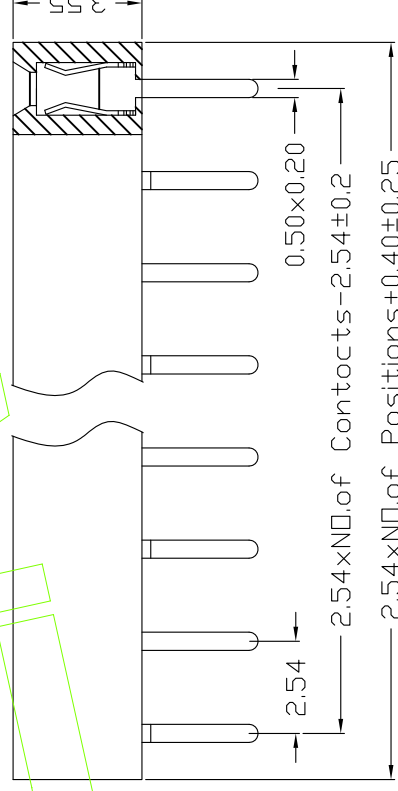
Ordering Information

3F35W-11 XX XX X U X X Δ_{A1} 


TYPE A



TYPE B



Recommended P.C.B layout

[illegible]