

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

3F34X- 11 XX XX X U X 1 Δ

No. of Pins Per Row 1-40P	Contact Plating	Insulator Material	Packing
G=10" Gold	G=10" Gold	B: PA6T	A: PE Bag
G=50" Gold	G=50" Gold	C: PA6T	C: Tube
G=100" Gold	G=100" Gold	D: LCP	E: Tray
G=150" Gold	G=150" Gold		F: Tape & Reel
G=300" Gold	G=300" Gold		
F=10" Gold/Tin	F=10" Gold/Tin		
F=30" Gold/Tin	F=30" Gold/Tin		
F=50" Gold/Tin	F=50" Gold/Tin		
F=100" Gold/Tin	F=100" Gold/Tin		
F=150" Gold/Tin	F=150" Gold/Tin		
F=300" Gold/Tin	F=300" Gold/Tin		
Sn= Tin	Sn= Tin		
Sh= Matte Tin	Sh= Matte Tin		

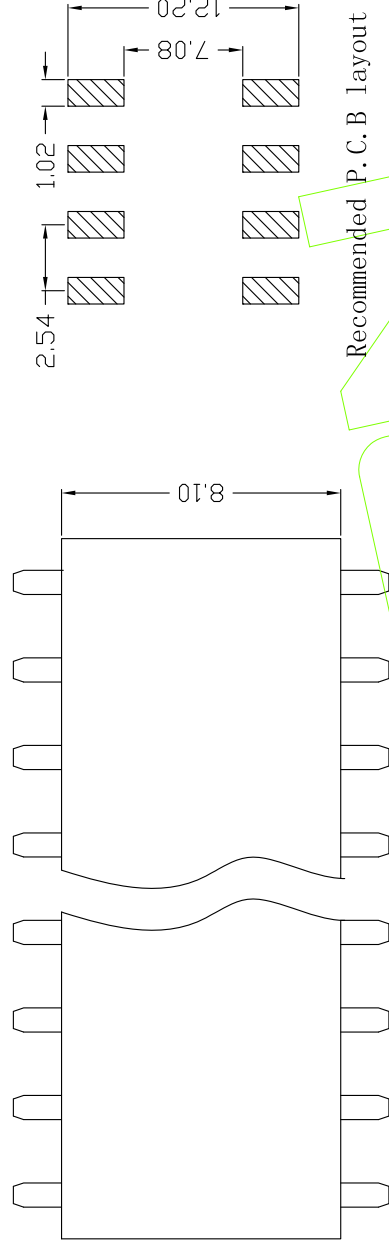

Recommended P.C.B layout

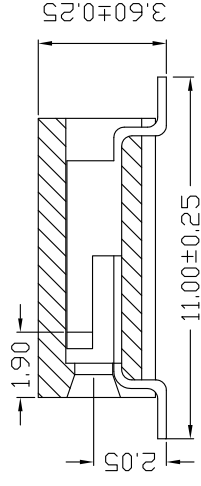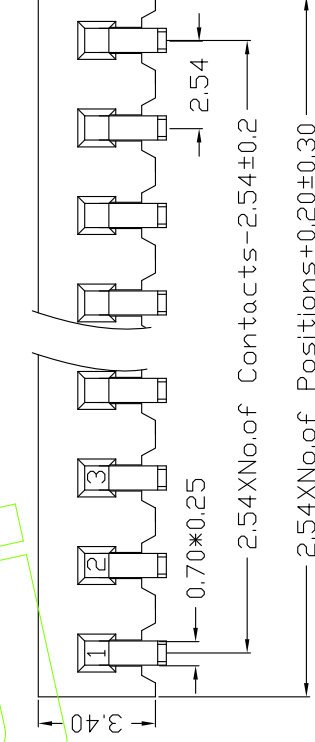

		连润电子有限公司		Lrcon Electronics Co., Ltd	
		Lrcon		3F34X-11XXXXXU1	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	PART NO.
A0	12/05/18	NEW	罗荣军	CHECK	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	方里军	APPROVE	Customer No.
		CHANGE		2.54单排母 塑高3.4 U型 SWT 侧插式	