

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Contact :Brass/Phosphor bronze

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.



绝缘阻抗: 1000 M Ω min.

耐电压: AC 500V.



温度范围: -40℃ to +105℃
Temperature Range: -40°C to +105°C

Ordering Information

3F59H- 21 XX XX X U X 1 $\triangle_{A1}$

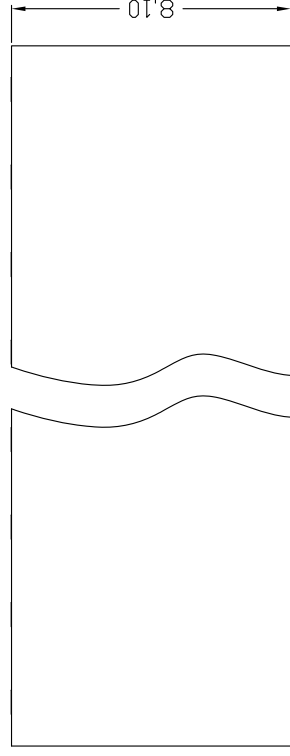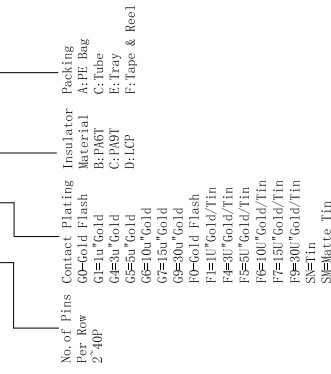

Recommended P.C.B layout

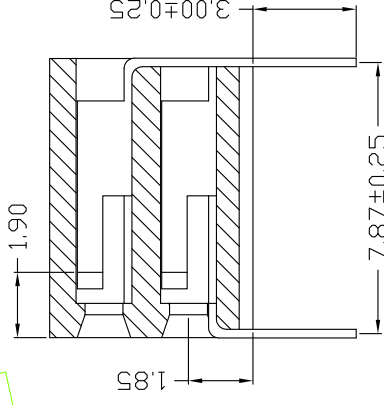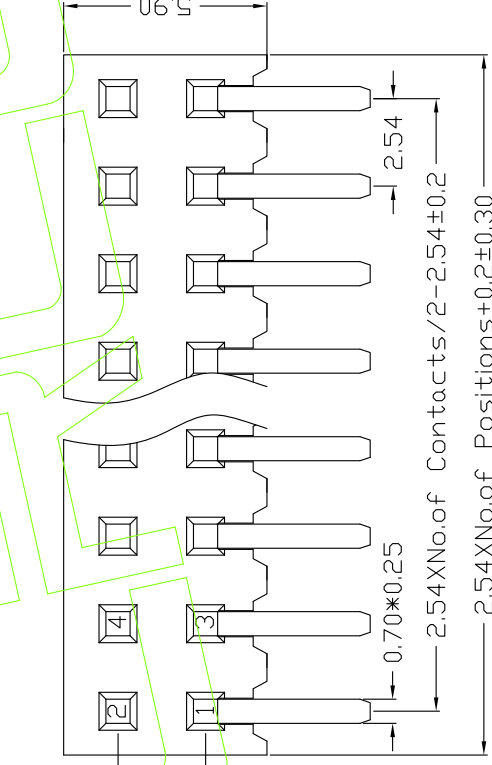[illegible]