

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ

绝缘阻抗: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min.

Insulating Resistor
耐电压 AC 500V

耐压: AC 500V.
Withstanding Voltage: AC 500V.



温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40℃~105℃
Operation Temperature: -40℃~105℃



Correspondence: maria.fernanda.fernandes@univie.ac.at

Ordering Information

2F43Z- 11 XX XX X U X 1 $\triangle_{A1}$

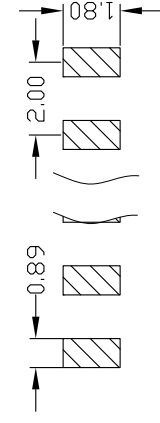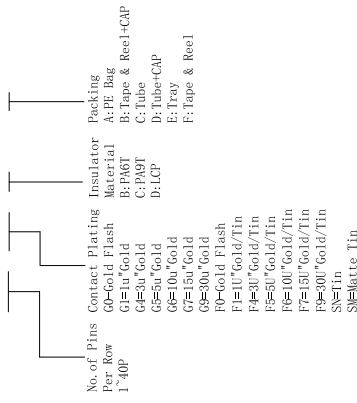

Recommended P. C. B layout

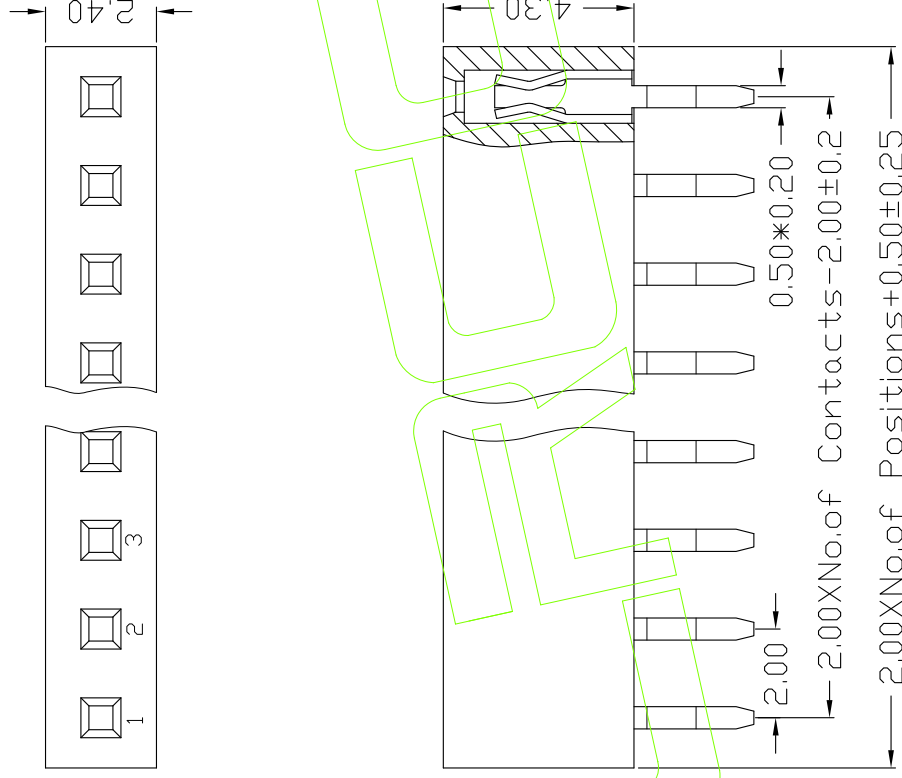[illegible]