

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子：黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.

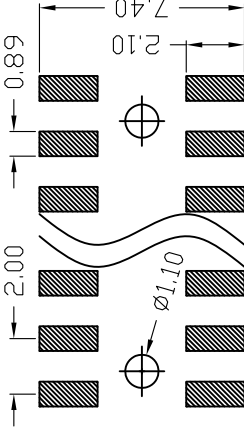
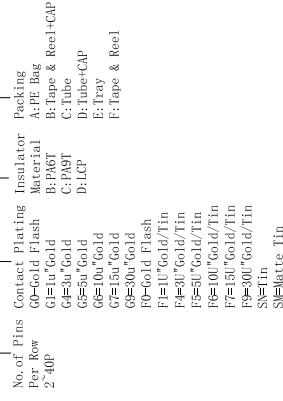
温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C


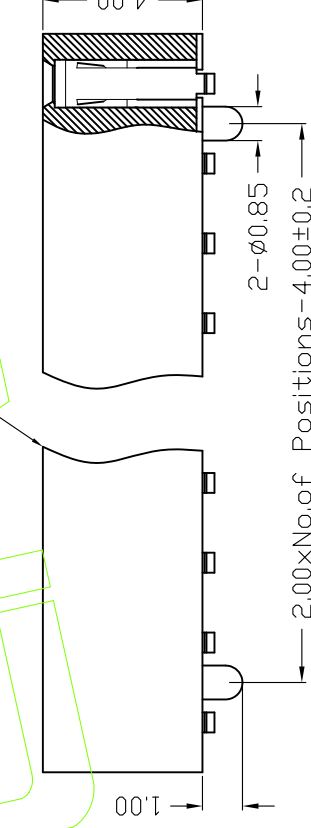
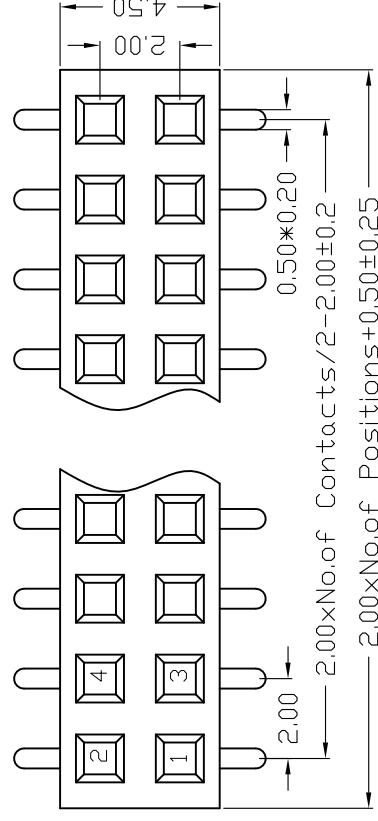
0
0
0
4
-
2
0
2
-
.
0

+

Ordering Information

2F40M-21 XX XX X 0 X 2 $\triangle_{A1}$ 

Recommended P.C.B layout

[illegible]