



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

额定电压: 2 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

2F40S- 21 XX XX X U X 1 Δ

No. of Pins Per Row 2/40P	Contact Plating G=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold G4=10u" Gold G5=15u" Gold G6=30u" Gold F=10" Gold/Tin F1=30" Gold/Tin F2=50" Gold/Tin F3=100" Gold/Tin F4=150" Gold/Tin F5=300" Gold/Tin S=Sn S1=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
------------------------------	--	--	---

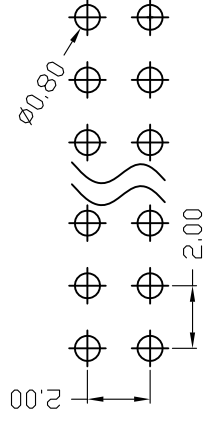

Recommended P.C.B layout

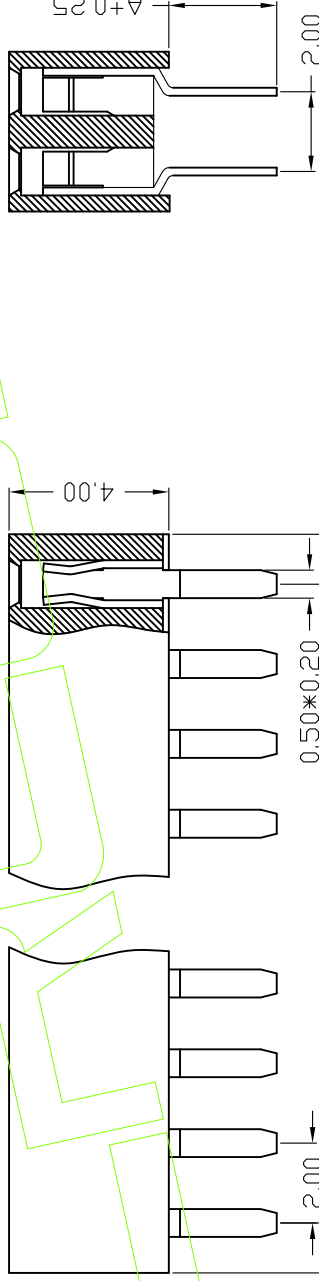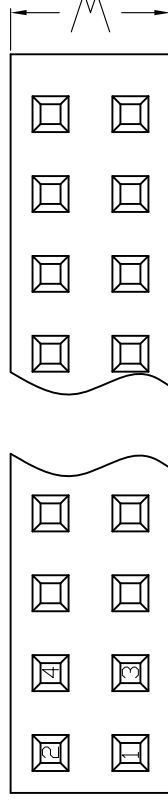

DIM"W"	4.0	4.5
DIM"A"	2.4	2.8

Lrcon		连润电子有限公司		Lrcon Electronics Co., Ltd	
20/06/09		Improve numbering instructions (完善编号标注说明)		2F40S-21XXXXXU1	
12/05/18		NEW		2.0双排母 塑高4.0 180度 U型	
DATE		MODIFICATION DESCRIPTION		Customer No.	
A1		张涛		DESIGN	
A0		张涛		CHECK	
REV		CHANGE		APPROVE	
1		2		3	
4		5		6	
7		8		9	
10		11		12	