

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.

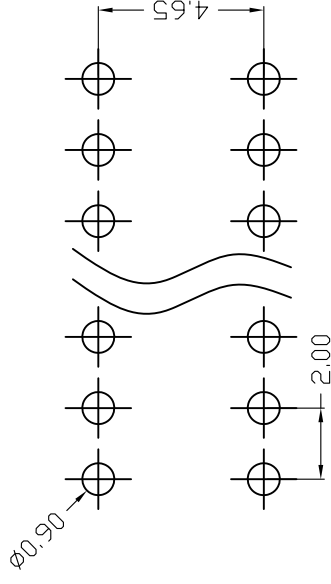
温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

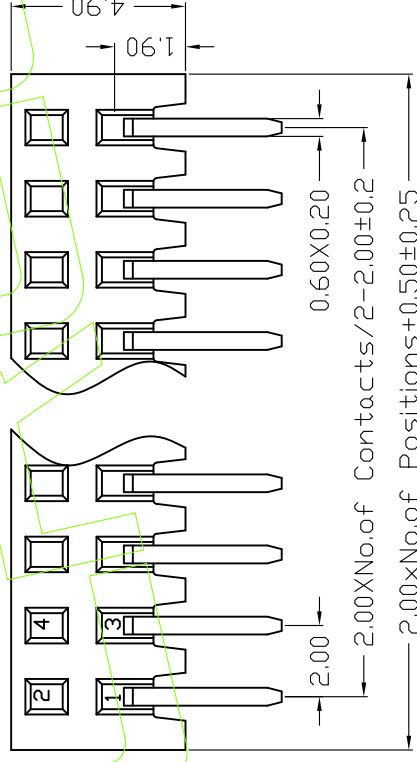

Ordering Information

2F49H- 21 XX XX X U X 1 Δ

No. of Pins Per Row 2/40P	Contact Plating	Insulator Material	Packing
G=10" Gold	G: PA6T	B: PA6T	A: PE Bag
G=30" Gold	C: PA6T	C: PA6T	B: Tape & Reel+CAP
G=50" Gold	D: LCP	D: LCP	C: Tube
G=100" Gold			D: Tube+CAP
G=150" Gold			E: Tray
G=300" Gold			F: Tape & Reel
P=10" Gold/Tin			
P=30" Gold/Tin			
P=50" Gold/Tin			
P=100" Gold/Tin			
P=150" Gold/Tin			
P=300" Gold/Tin			
Sn=Sn			
Sn=Matte Tin			



Recommended P. C. B layout

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DRAW	LI	ANR	20/06/09	SCALE		Fit	H				
												UNIT	SIZE		PART NO.	TITLE:	Customer No.		
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ _{A1}	张涛	X.XX	±0.25		DESIGN	张涛	张涛		A4	DESIGN	MM	2F49H-21XXXXXU1				
A0	12/05/18	NEW	——	——	X.XXX	±0.15		CHECK	罗荣军	罗荣军		1/1	CHECK						
					Angle	±3°													