

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact : Phosphor bronze

2. 特性 (Characteristics):

额定电流: 1 AMP

接触电阻: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

4F57M- 21 XX XX X U X 1 Δ

No. of Pins	Contact Plating	Insulator	Packing
Pz: Row	G: Gold Flash	A: PE Bag	A: PE Bag
1 30P	G=10" Gold	B: PA6T	B: Tape & Reel+CAP
	G=30" Gold	C: PA6T	C: Tube
	G=50" Gold	D: LCP	D: Tube+CAP
	G=100" Gold		E: Tray
	G=150" Gold		F: Tape & Reel
	G=300" Gold		
	P: Gold Flash		
	F=10" Gold/Tin		
	F=30" Gold/Tin		
	F=50" Gold/Tin		
	F=100" Gold/Tin		
	F=150" Gold/Tin		
	F=300" Gold/Tin		
	Sn= Tin		
	Sh= Matte Tin		

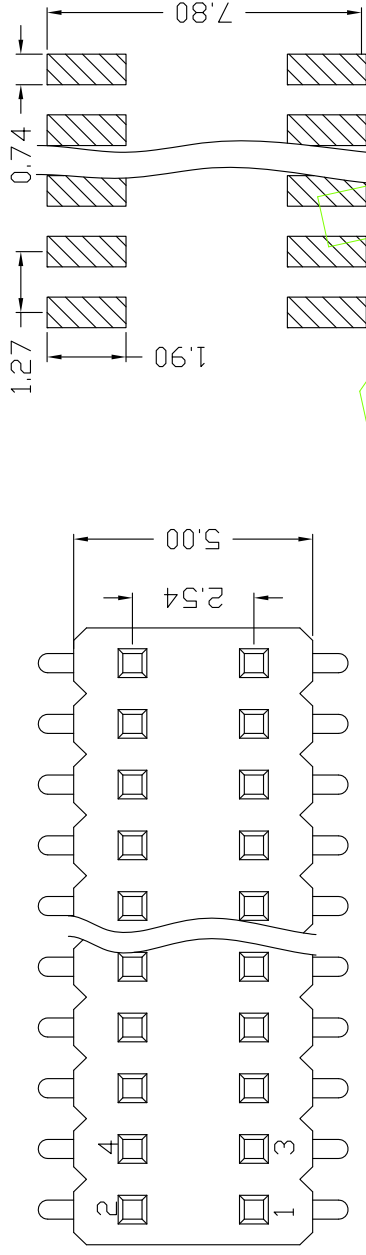

Recommended P. C. B layout

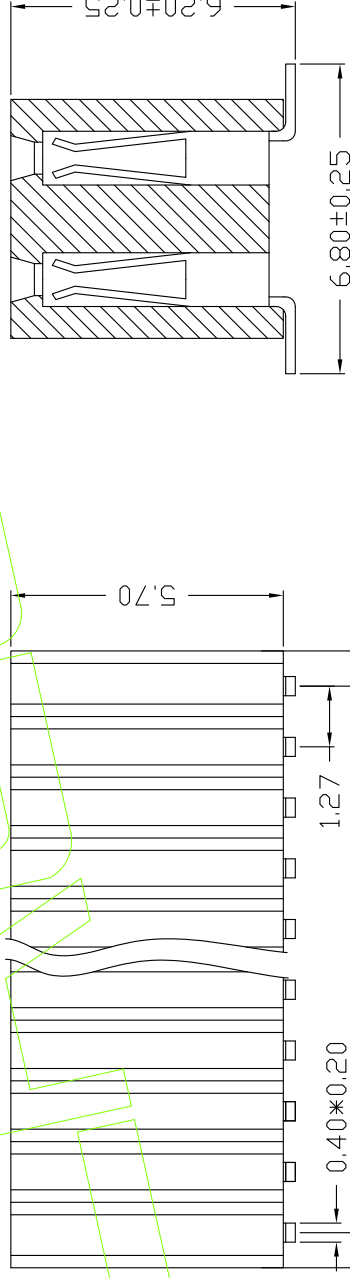

Lrcon Electronics Co., Ltd

Lrcon

连润电子有限公司

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	4F57M-21XXXXXU1	PART NO.
A0	12/05/18	NEW	张涛	CHECK	1/1	1.27*2.54双排母 塑高5.7 SMT	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Customer No.		