

HSF RoHS Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷銅

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 100 MΩ min.

耐电压: AC 500V.



Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


Temperature Range: -40°C to +105°C

Ordering Information

1F57S- 11 XX XX X U X 1 $\triangle_{A1}$

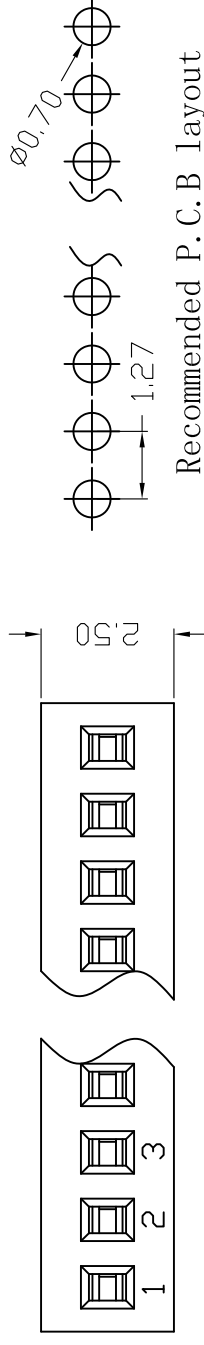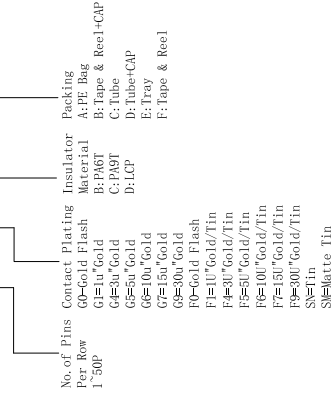

Recommended P.C.B layout

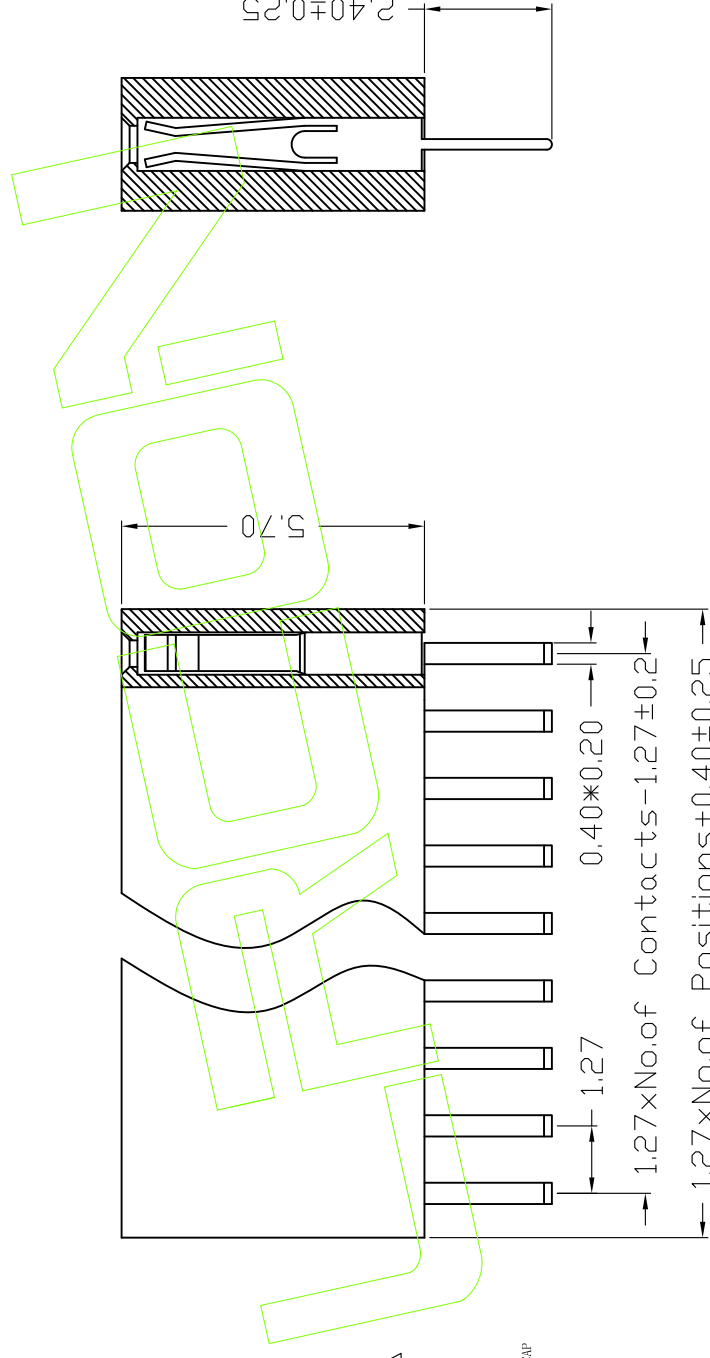[illegible]