

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子：磷銅

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 M Ω min.

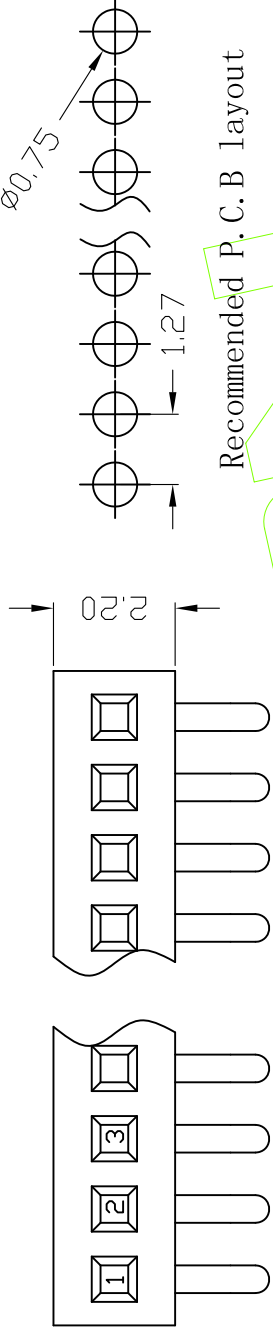
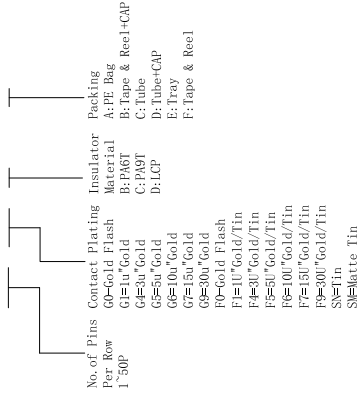
耐电压: AC 500V.

Withstanding Voltage: AC 500V.

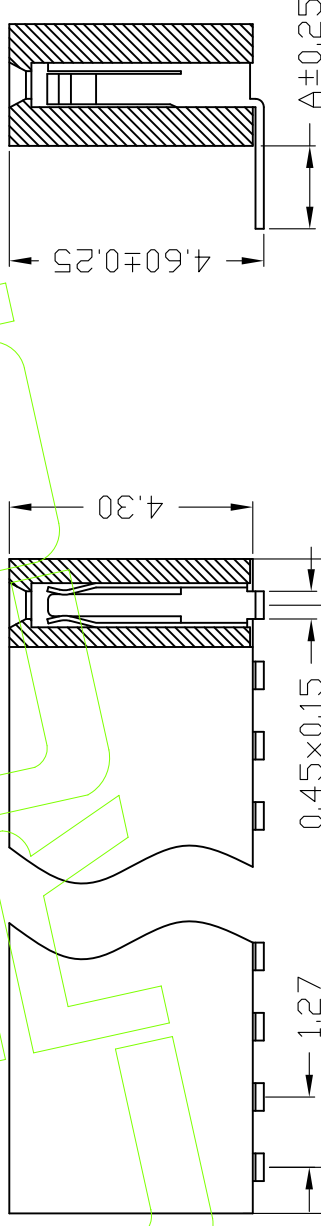
温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

1F43R- 11 XX XX X U X 1 Δ_{A1} 

Recommended P.C.B layout



DIM"A"	1.7	2.0	2.4
--------	-----	-----	-----

[illegible]