



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact : Phosphor bronze

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

1F43C- 21 XX XX X U X 1 Δ

No. of Pins Pin Row 2 30P	Contact Plating	Insulator Material	Packing
G=10" Gold	G=10" Gold	D: PA6T	A: PE Bag
G=30" Gold	G=30" Gold	C: PA6T	B: Tape & Reel+CAP
G=50" Gold	G=50" Gold	D: LCP	C: Tube
G=101" Gold	G=101" Gold		D: Tube+CAP
G=150" Gold	G=150" Gold		E: Tray
G=300" Gold	G=300" Gold		F: Tape & Reel
P=0" Gold Flash	P=0" Gold Flash		
F=10" Gold/Tin	F=10" Gold/Tin		
F=30" Gold/Tin	F=30" Gold/Tin		
F=50" Gold/Tin	F=50" Gold/Tin		
F=101" Gold/Tin	F=101" Gold/Tin		
F=150" Gold/Tin	F=150" Gold/Tin		
F=300" Gold/Tin	F=300" Gold/Tin		
Sn=Sn	Sn=Sn		
Sn=Matte Tin	Sn=Matte Tin		

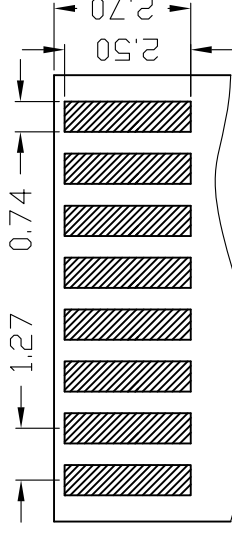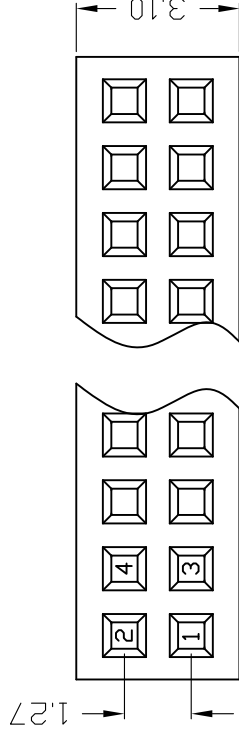

Recommended P.C.B layout

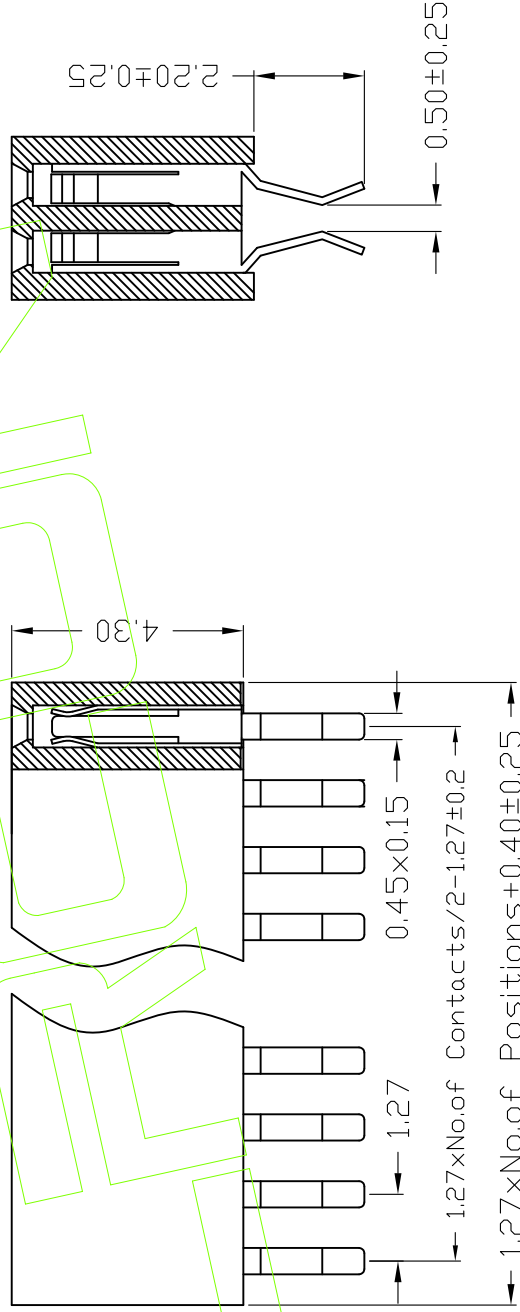

LIRCON
连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DRAW	LI/ANR	20/06/09	SCALE		Fit	H
											UNIT	SIZE		
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40	DESIGN	张涛	张涛		A4	DESIGN	MM	
A0	12/05/18	NEW			X.XX	±0.25	CHECK	罗荣军	罗荣军		1/1	CHECK		1F43C-21XXXXXU1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DRAW	LI/ANR	20/06/09	UNIT	SIZE	CHECK	PART NO.
													APPROVE	TITLE:
													Customer No.	1.27双排母 塑高4.3 U型 夹板式