



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

接触电阻: 1 AMP.

接触电阻: 20 mΩ MAX.

接触电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

1F34M- 21 XX XX X U X 2 Δ

No. of Pins Pins Row 2 30P	Contact Plating G=Gold Flash G1=10" Gold G2=30" Gold G3=50" Gold G4=100" Gold G5=150" Gold G6=300" Gold F0=Gold Flash F1=10" Gold/Tin F4=30" Gold/Tin F5=50" Gold/Tin F6=100" Gold/Tin F7=150" Gold/Tin F8=300" Gold/Tin S=Tin SM=Matte Tin	Insulator Material D: PA6T C: PA6T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
----------------------------------	---	---	---

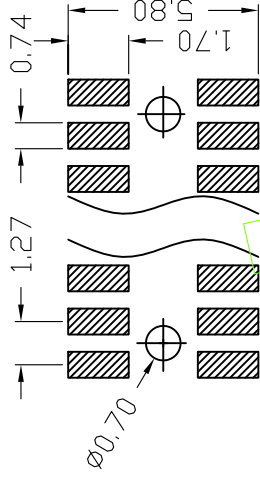

Recommended P.C.B layout

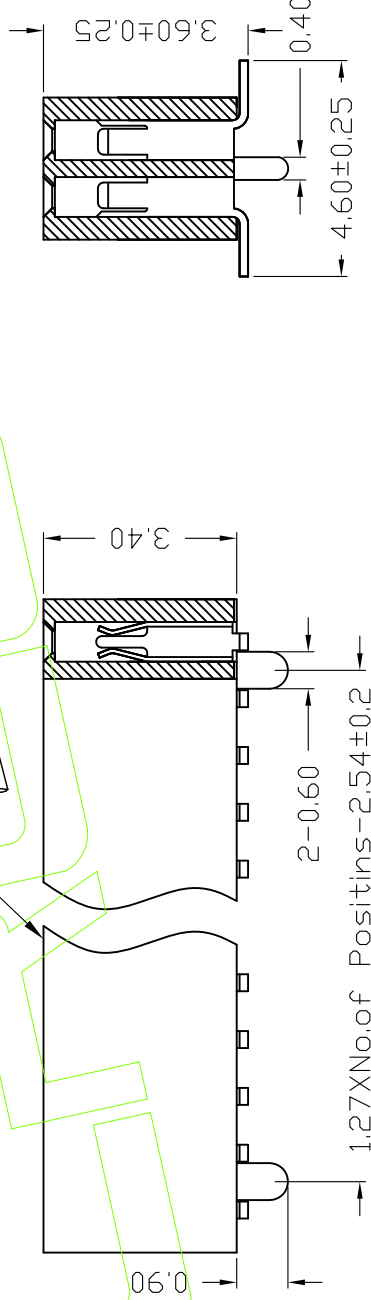

Lrcon 连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	Fit
A0	12/05/18	NEW	张涛	CHECK	APPROVE	Customer No.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.

1F34M-21XXXXXXU2	PART NO.	1.27双排母 塑高3.4 U型 SMT 带柱
TITLE:	CHECK	APPROVE
Customer No.	APPROVE	Customer No.