

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子：磷銅

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX

接触电阻: $20\text{ m}\Omega$ MAX.
Contact Resistance: $20\text{ m}\Omega$ MAX.

边缘阻抗: 1000 MO $\cdot$ min

绝缘阻抗: 1000 MV min.
Insulating Resistance: 1000 MO min

耐电压: AC 500V

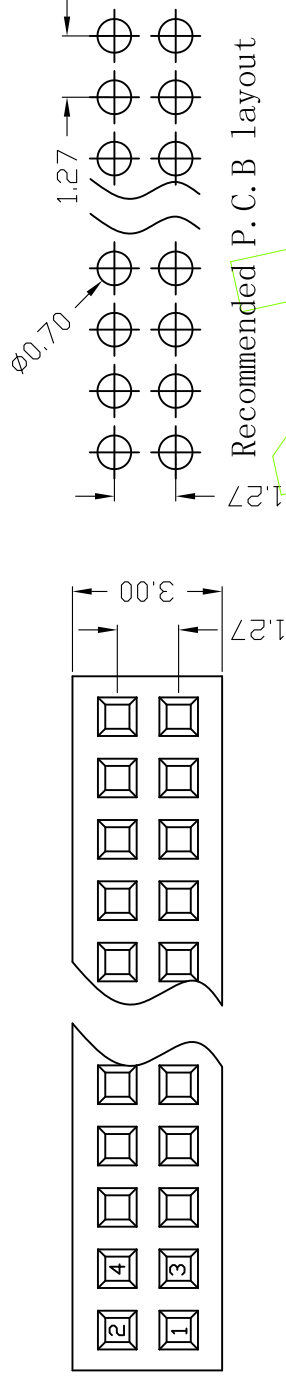
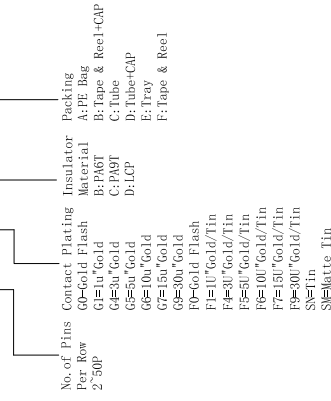
耐压: AC 500V.
Withstanding Voltage: AC 500V.

Withstanding voltage: AC 500V.
温度范围 -40°C ~ +105°C

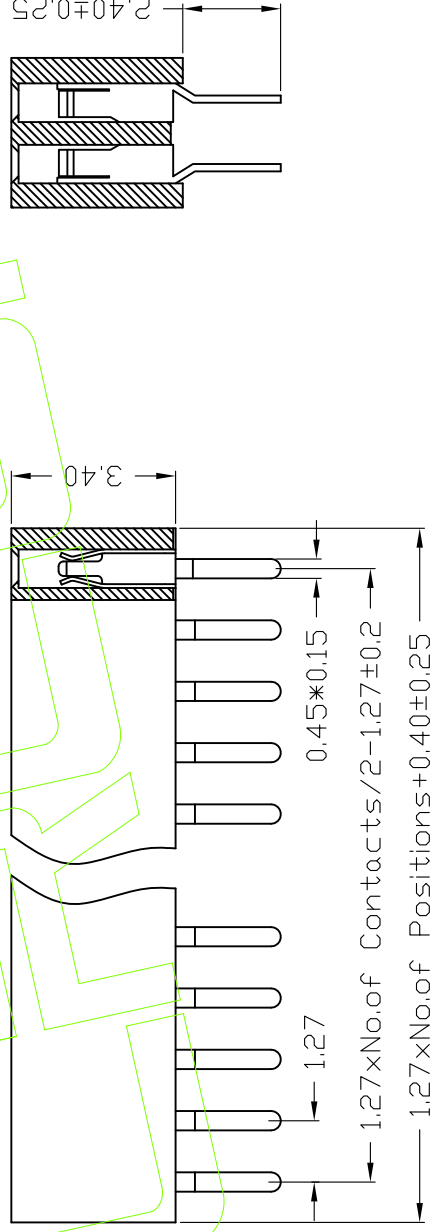
温度范围: -40℃ to +105℃

Temperature Range: -40°C to +105°C

Ordering Information

1F34S-21 XX XX X U X 1 $\triangle_{A1}$ 

Recommended P. C. B layout

[illegible]