

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C




Ordering Information

1F34Z- 11 XX XX X U X 1 Δ

No. of Pins	Contact Plating	Insulator	Packing
Pins Row	Gold Flash	Material	A: PE Bag
1 30P	G=10" Gold	B: PA6T	B: Tape & Reel+CAP
	G=30" Gold	C: PA6T	C: Tube
	G=50" Gold	D: LCP	D: Tube+CAP
	G=100" Gold		E: Tray
	G=150" Gold		F: Tape & Reel
	G=300" Gold		
	P0=Gold Flash		
	F=10" Gold/Tin		
	F=30" Gold/Tin		
	F=50" Gold/Tin		
	F=100" Gold/Tin		
	F=150" Gold/Tin		
	F=300" Gold/Tin		
	Sn=Tin		
	Sh=Matte Tin		

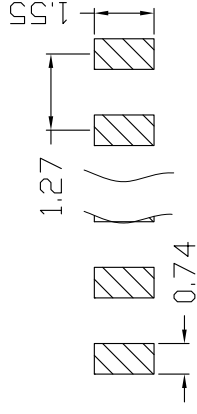

Recommended P.C.B layout

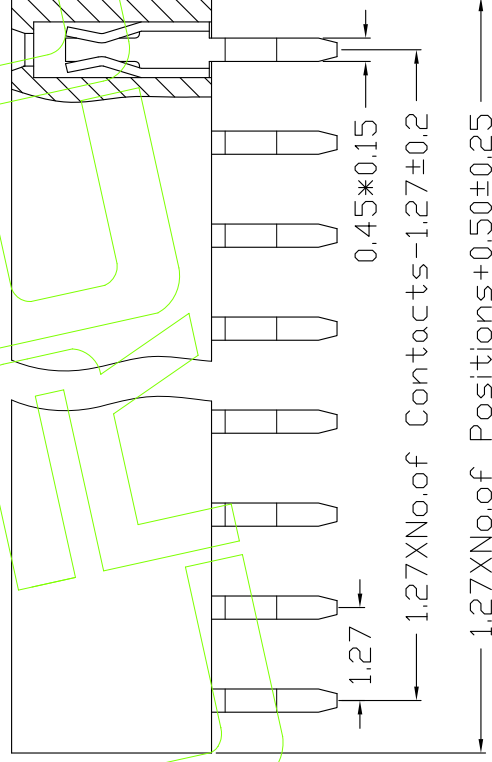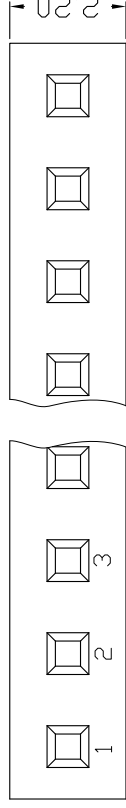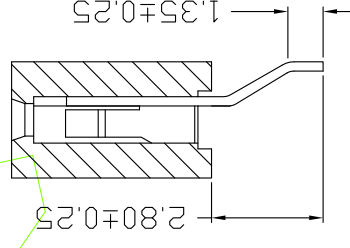

Lrcon		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1		20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	Δ
A0		12/05/18	NEW		
REV	DATE	MODIFICATION DESCRIPTION			
H		20/06/09	DESIGN	张涛	1F34Z-11XXXXXU1
H		12/05/18	CHECK	罗荣军	PH1.27 单排母座 塑高3.4MM 卧贴
H		12/05/18	APPROVE	方里军	
H		12/05/18	PROJ.	方里军	
H		12/05/18	SHEET	1/1	
H		12/05/18	SIZE	A4	
H		12/05/18	UNIT	MM	
H		12/05/18	Fit	MM	