

HSF RoHS

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0,Color: Black

端子：磷銅

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 100 MΩ MIN.

耐电压: AC 500V.

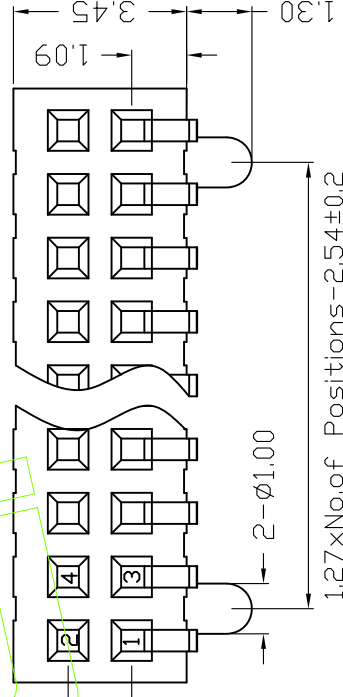
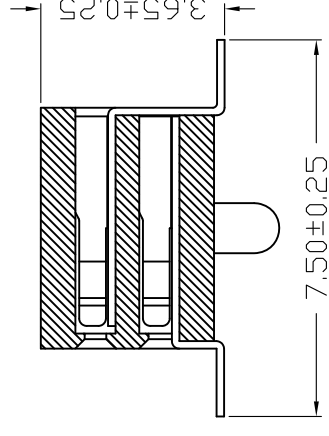
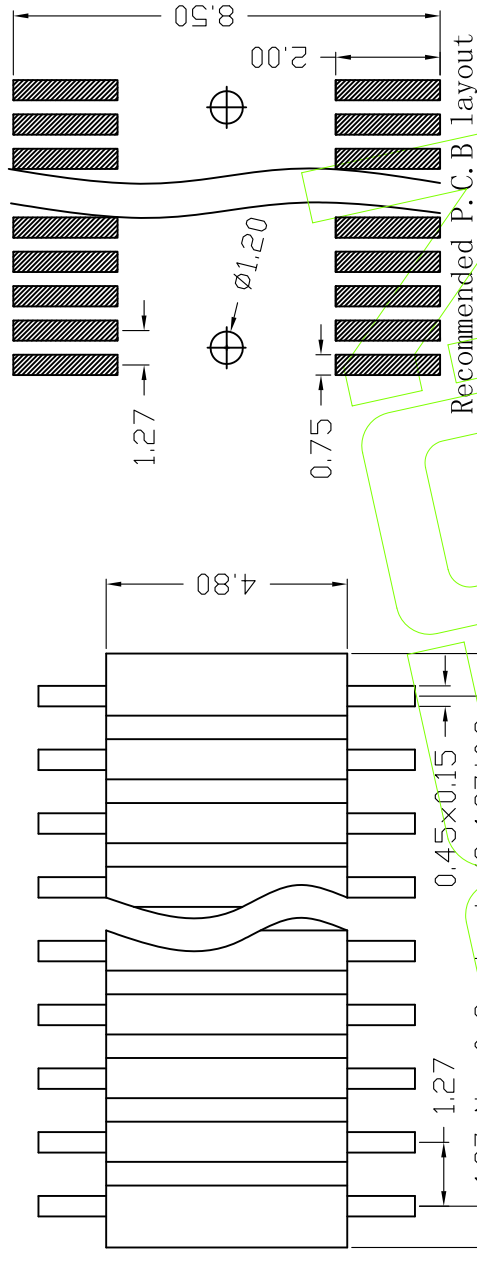
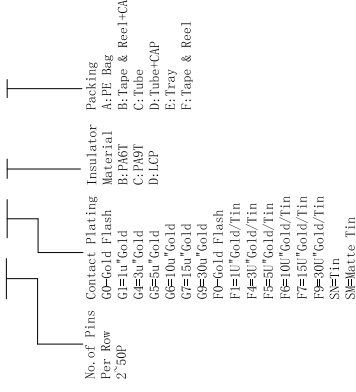
Withstanding Voltage: AC

温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to 105°C
Temperature Range: -40°C to 105°C

Ordering Information

1F35X-21 XX XX X U X 2 $\triangle_{A1}$

[illegible]