

Specifications

备注(Remark)

1. 材料(MATERIAL)
胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact :Phosphor bronze

2. 特性 (characteristics):

额定电流: 1.0 AMP

Rating Current:1.0 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40℃ to+105℃

Temperature Range: -40℃ to+105℃

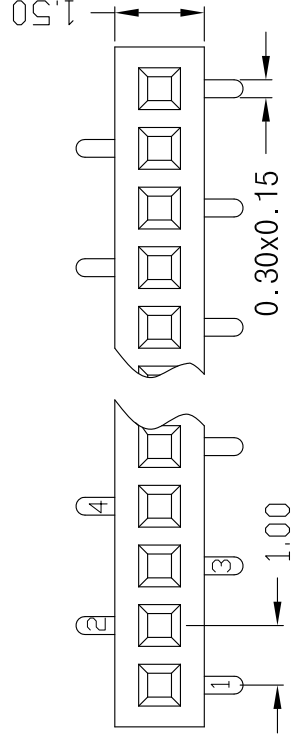


TYPE A

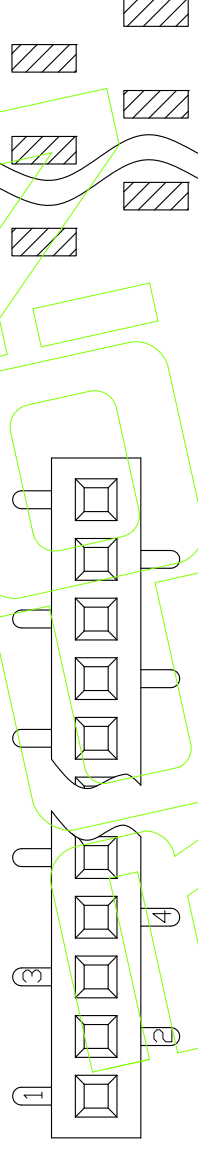


Ordering Information

5F21M-11 XX XX I I X X

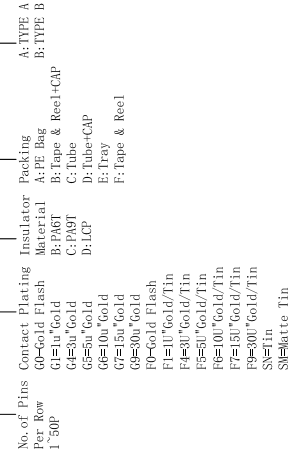

Recommended P.C.B. layout

[illegible]