

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-O, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

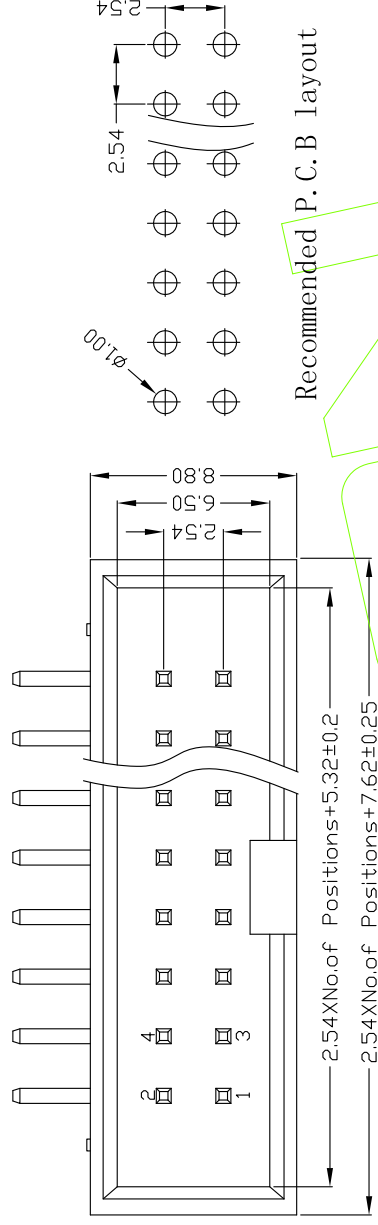

Ordering Information

3B90R- 1 XX XX X X X 1 A1

No. of Pins	6 64P
Contact Plating	Gold Flash
Insulator Color	B: Black
Material:	B: PBT
	G: Grey
	W: White
	C: PA6T
	T: True color
	D: LCP
Packing	A: PE bag
	B: Tape & Reel-CAP
	C: Tube
	D: Tube-CAP
	E: Tray
	F: Tape & Reel

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	Fit
A0	12/05/18	NEW	罗荣军	CHECK	1/1	DESIGN
REV	DATE	MODIFICATION DESCRIPTION	APPROVE	PROJ.	CUSTOMER No.	TITLE:
						3B90R-1XXXXXX1
						2.54筒牛 塑高9.0 90度