

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

4B59R- 1 XX XX X X X 1 Δ

No. of Pins	Contact Plating	Insulator Color	Packing
6 68P	Gold Flash	Material A: PE Bag	A: PE Bag
	G1=10" Gold	C: PA6T	B: Black
	G2=30" Gold	C: PA6T	C: Tube
	G3=50" Gold	D: LCP	D: Tube+GIP
	G4=100" Gold		E: Tray
	G5=150" Gold		F: Tape & Reel
	G6=300" Gold		
	F0=Gold Flash		
	F1=10" Gold/Tin		
	F2=30" Gold/Tin		
	F3=50" Gold/Tin		
	F4=100" Gold/Tin		
	F5=150" Gold/Tin		
	F6=300" Gold/Tin		
	S0=Sn		
	S1=Matte Tin		

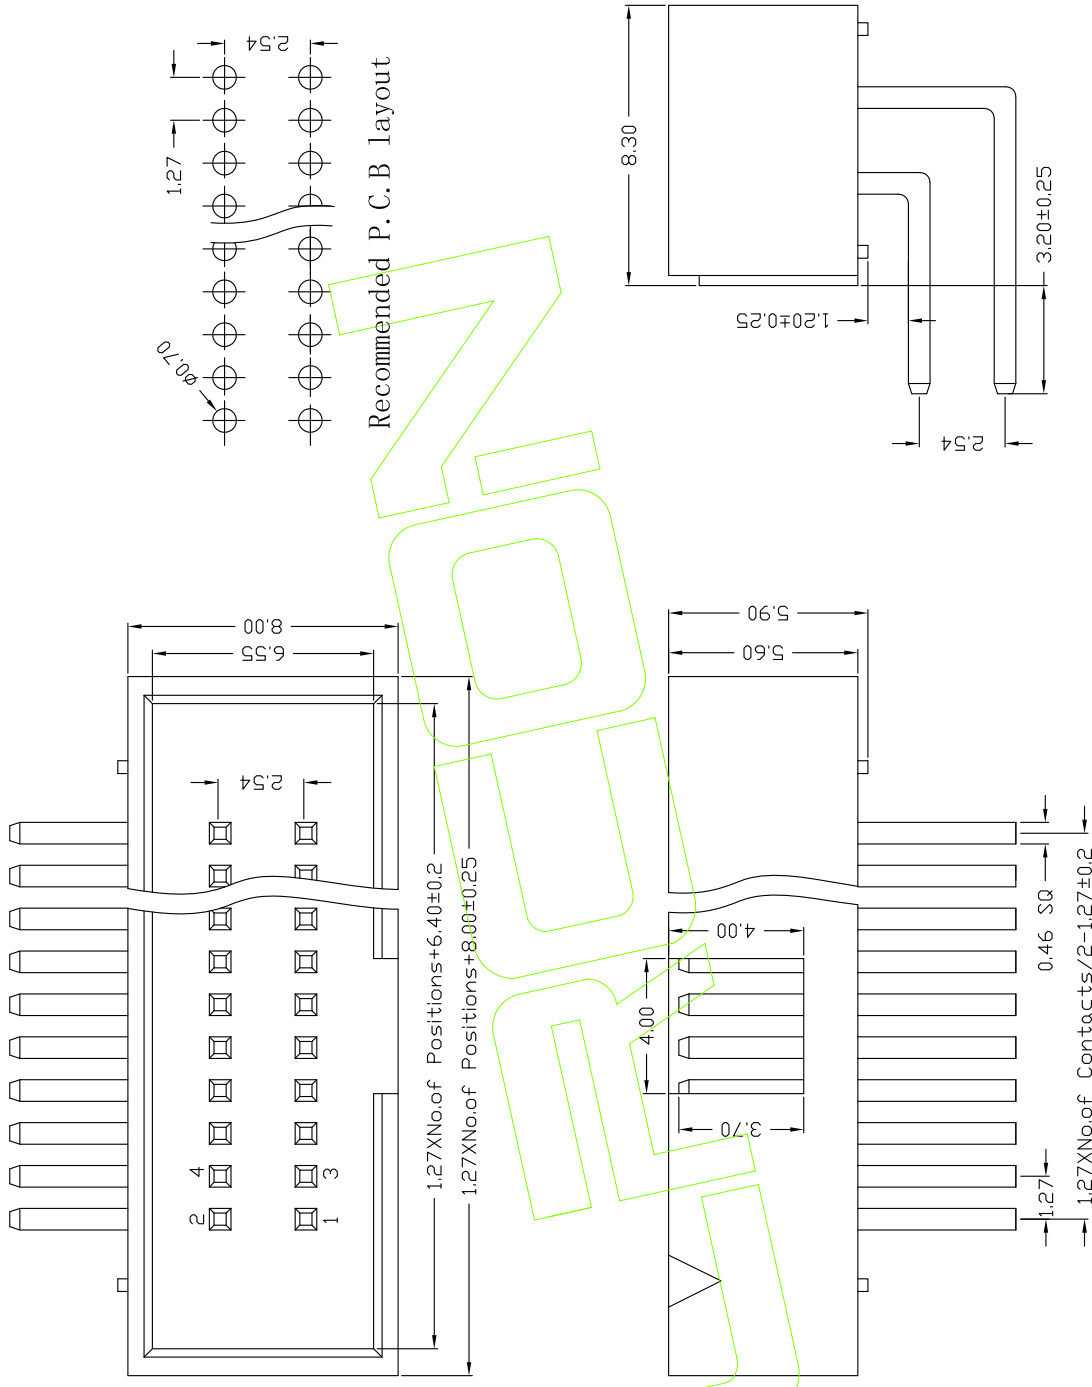

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	罗荣军	张涛	DESIGN	UNIT	SCALE	Fit	MM	4B59R-1XXXXXX1	PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40	张涛	DESIGN	A4	DESIGN	MM	UNIT	SCALE	Fit	MM	4B59R-1XXXXXX1	PART NO.	TITLE:	Customer No.
A0	12/05/18	NEW	—	—	Angle	±3°	—	CHECK	1/1	CHECK	1/1	SHEET	PROJ.	APPROVE	APPROVE	1.27*2.54筒牛 塑高5.9 90度	—	—	—