

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information


3EXXM- 1 XX XX X X X 2 Δ

No. of Pins
6 Pin


Contact Plating
G=Gold Flash
H=30" Gold
I=50" Gold
J=100" Gold
K=150" Gold
L=200" Gold
M=300" Gold
N=Gold
O=Gold
P=Gold
Q=Gold
R=Gold
S=Gold
T=Gold
U=Gold
V=Gold
W=Gold
X=Gold
Y=Gold
Z=Gold

Insulator Color
Material: B=Black
C=Grey
D=White
E=LCF

Packing
A=PE Bag
B=Tube & Reel+CAP
C=Tray
D=LCF

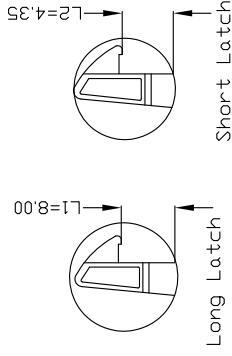

Recommended P.C.B layout

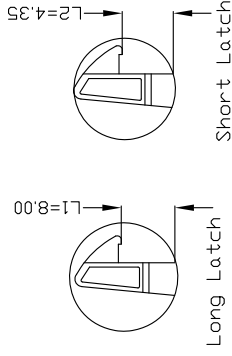

Recommended P.C.B layout

