

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

额定电压: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information


3EXXM- 1 XX XX X X X 1

No. of Pins
6 Pin



Contact Plating
G=Gold Flash
G=30" Gold
G=50" Gold
G=100" Gold
G=150" Gold
G=200" Gold
G=300" Gold
F=10" Gold/Tin
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=200" Gold/Tin
F=300" Gold/Tin
S=Fin
SH=Matte Tin

Insulator Color
Material: B=Black
E=PA6T
C=PA9T
D=LCF

Packing
A: PE Bag
B: Tape & Reel+CAP
E: Tray

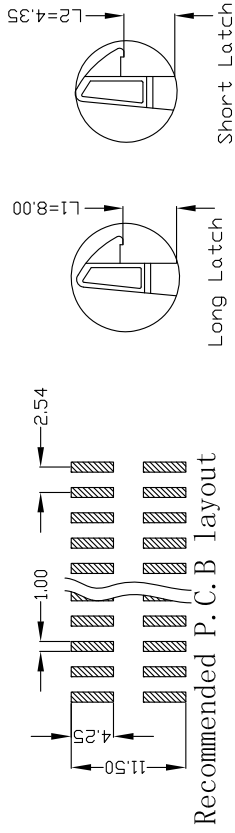

Recommended P.C.B layout

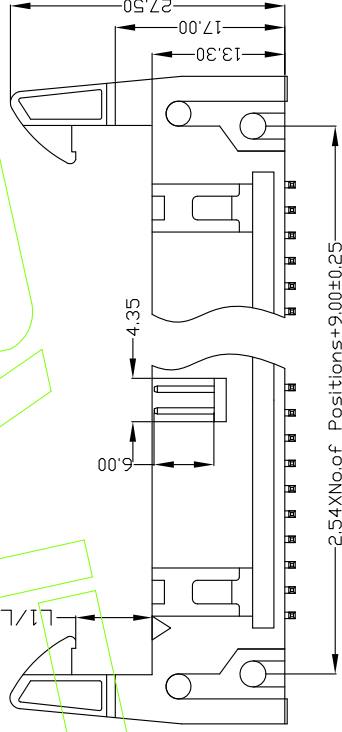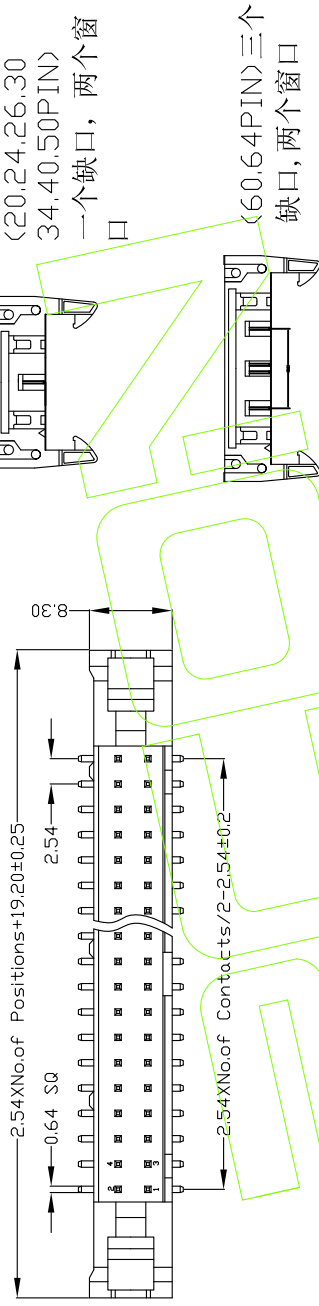

NAME	PARTNO
Long Latch	3E01M-1XXXXXXX1
Short Latch	3E02M-1XXXXXXX1

LIRCON
连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	LI	ANR	DRAW	OPERATION	SCALE	UNIT	Fit
A1	20/06/09	Improve numbering Instructions (完善编号标注说明)	△	Fang	X.X	±0.40	DESIGN	Fang		DESIGN		A4	DESIGN	MM
A0	12/05/18	NEW	—	—	X.XX	±0.25	CHECK			CHECK		1/1	CHECK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.		APPROVE				Customer No.

3EXXM-1XXXXXXX1

TITLE: 2.54牛角 SMT

Customer No.