

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.






额定电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

3EXXS-1 XX XX X X 1 $\triangle_{A1}$

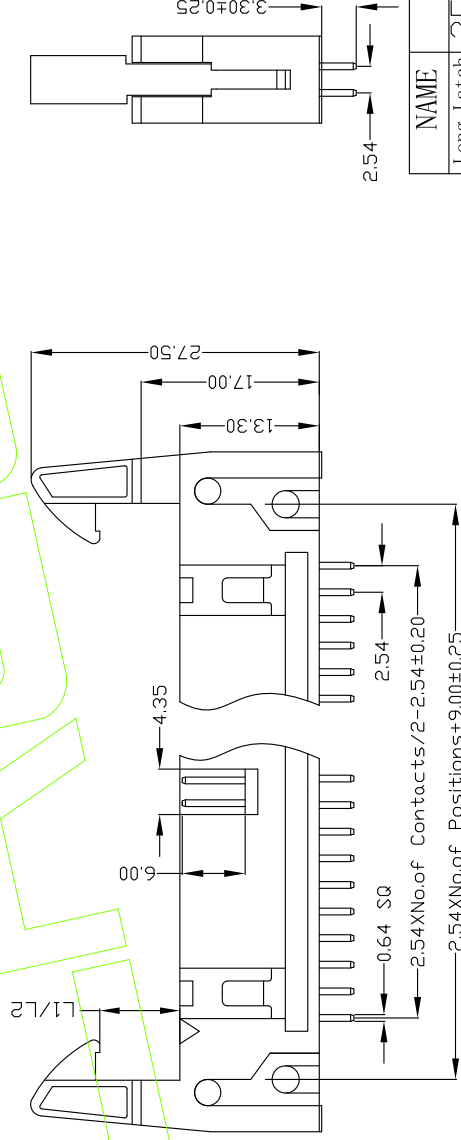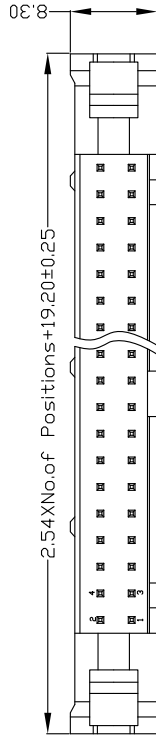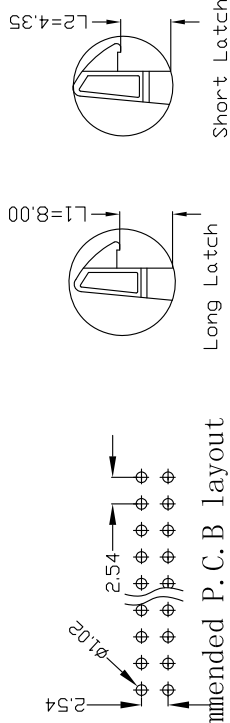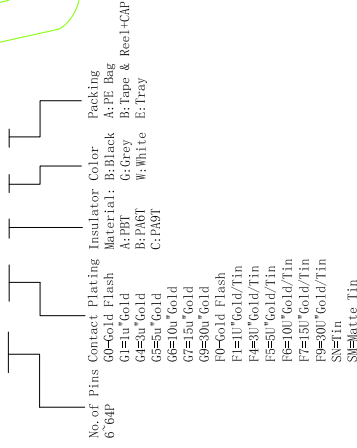

NAME	PARTNO
Long Latch	3E01S-1XXXXXXX1
Short Latch	3E02S-1XXXXXXX1

LARCON 连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve number ing instructions(完善编号标注说明)	Δ_{Δ}	Fang	X.XX ±0.25		SIZE	A4	DESIGN	PART NO.	3EXXS-1XXXXXXX1
A0	12/05/18	NEW	— — — —	— — — —	X.XXX ±0.15	CHECK	SHEET	1/1	CHECK	TITLE:	2.54牛角 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.	