

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接觸阻抗: 20 mΩ MAX

接觸壓力: 20 mN MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

绝缘电阻: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V

耐电压: AC 500V.
Withstanding Voltage: AC 500V.




温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

2EXX-1 XX XX X¹X¹ Δ_{A1}

No. of Pins	Contact Plating	Insulator Color	Packing
6 64P	GP-Gold Flash	D:Black	A:PE Bag
	G1=50 Gold	P:PA6I	B:Paper & Reel+CAP
	G2=50 Gold	C:PA6I	D:Grey
	G3=50 Gold	W:White	E:Tray
	G4=10u Gold	D:LCF	
	G7=15u Gold		
	G9=50u Gold		
	P0-Gold Flash		
	F1=10 Gold/Tin		
	F4=30 Gold/Tin		
	F5=50 Gold/Tin		
	F6=100 Gold/Tin		
	F7=150 Gold/Tin		
	F9=200 Gold/Tin		
	SN=In		
	SW=White Tin		

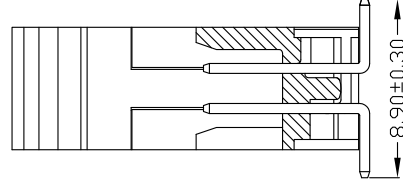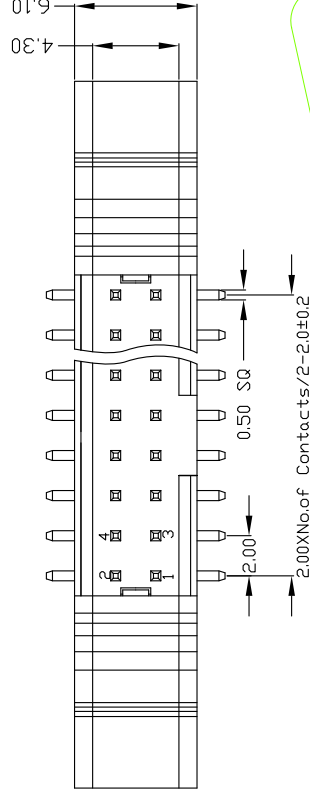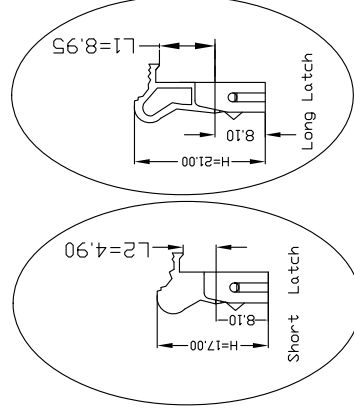

NAME	PART NO
Long Latch	2E01M-1XXXXXXX1
Short Latch	2E02M-1XXXXXXX1

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		Fang	X.XX ±0.25			SIZE	A4	DESIGN	PART NO.	2EXM-1XXXXXX1
A0	12/05/18	NEW	—	—	X.XXX ±0.15	CHECK		SHEET	1/1	CHECK	TITLE:	2.0牛角 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.		APPROVE	Customer No.	