

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接觸阻抗: 20 mΩ MAX;

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

绝缘电阻: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C


temperature range: 40°C to 100°C

Ordering Information

2EXXS-1 XX XX XX X 1 Δ_{A1}

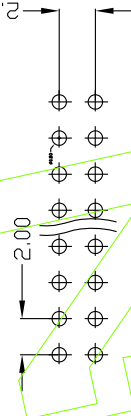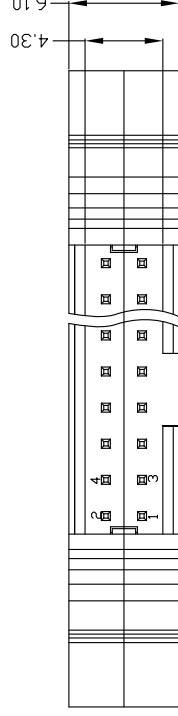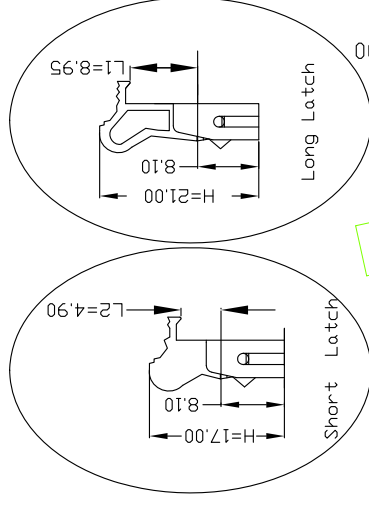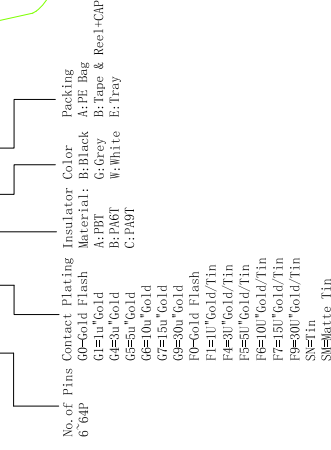

Recommended P.C.B layout

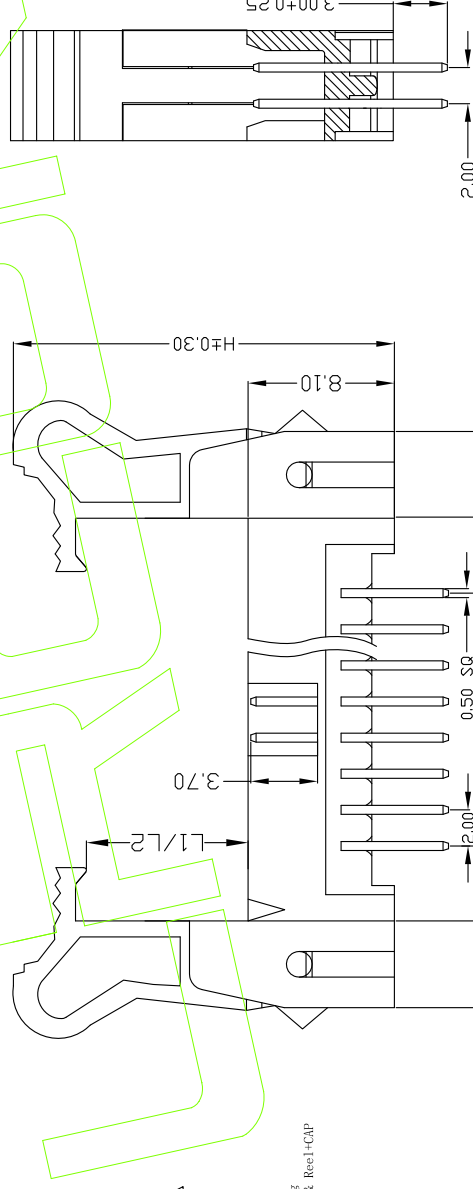

NAME	PART NO
Long Latch	2E01S-1XXXXXXX1
Short Latch	2E02S-1XXXXXXX1

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		Fang	X.XX ±0.25			SIZE	A4	DESIGN	PART NO.	2EXXS-1XXXXXX1
A0	12/05/18	NEW	—	—	X.XXX ±0.15	CHECK		SHEET	1/1	CHECK	TITLE:	2.0牛角 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.		APPROVE	Customer No.	