



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP /PA6T+30%G.F UL94V-O, 颜色: 黑色.

Housing:LCP/PA6T+30%G.F UL94V-O,Color:Black

四方针: 黄铜

Contact:Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current:1 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40°C to+105°C

Temperature Range:-40°C to+105°C

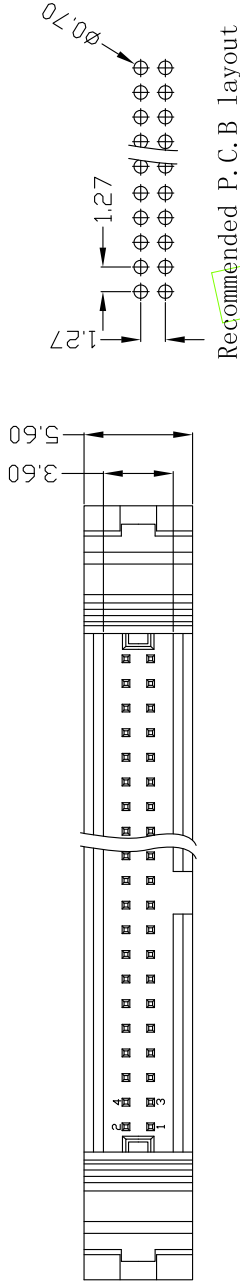

Recommended P.C.B layout



Ordering Information

1E02S- 1 XXX XX X X X 1

No. of Pins
6 68P
Contact Plating
G0=Gold Flash
G1=10"Gold
G2=30"Gold
G3=50"Gold
G4=100"Gold
G5=150"Gold
G6=300"Gold
F0=Gold Flash
F1=10"Gold/Tin
F2=30"Gold/Tin
F3=50"Gold/Tin
F4=100"Gold/Tin
F5=150"Gold/Tin
F6=300"Gold/Tin
SN=Tin
SM=Matte Tin

Insulator Color
A:PE Bag
B:Paper & Reel+CAP
C:PPH
D:ICP
E:Tray

Packing

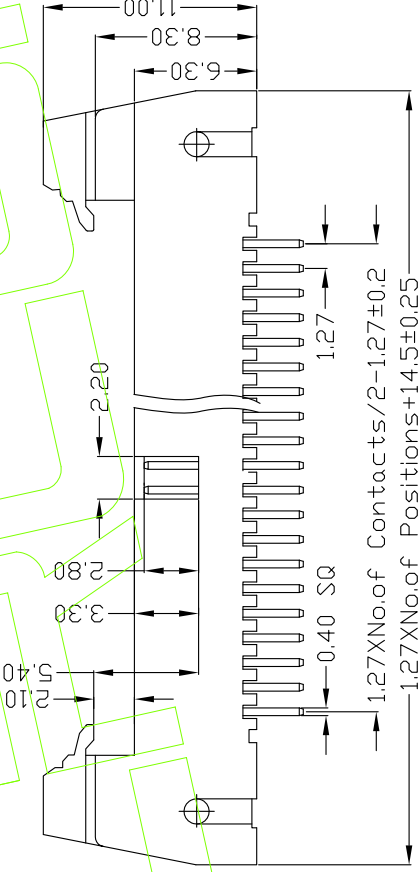

LIRCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	ANGLE	X.XXX	X.XX	X.X	OPERATION		DRAW	LI	ANR	SCALE		Fit	PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering Instructions (完善编号标注说明)	△A	Fang	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
A0	12/05/18	NEW	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	ANGLE	X.XXX	X.XX	X.X	OPERATION	DRAW	LI	ANR	SCALE	UNIT	SIZE	CHECK	DESIGN	APPROVE	Customer No.

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----