

HSF RoHS Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics)

额定电流: 1 AMP

Rating Current: 1 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: $20\text{ m}\Omega$ MAX.
Contact Resistance: $20\text{ m}\Omega$ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


额定电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information


4E03R- 1 XXX XX X X X 1



No. of Pins	Contact Plating	Insulator	Color	Packing
6"68P	GO-Gold Flash GI=1u"Gold G=3u"Gold G5=5u"Gold	Material: B:PA6T C:PA9T D:LCP	B:Black G:Grey W:White	A:PE Bag B:Tape & Reel+CAP E:Tray

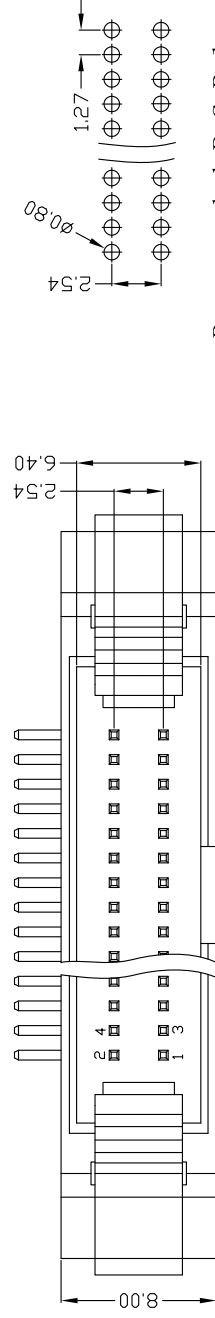

Recommended P.C.B layout

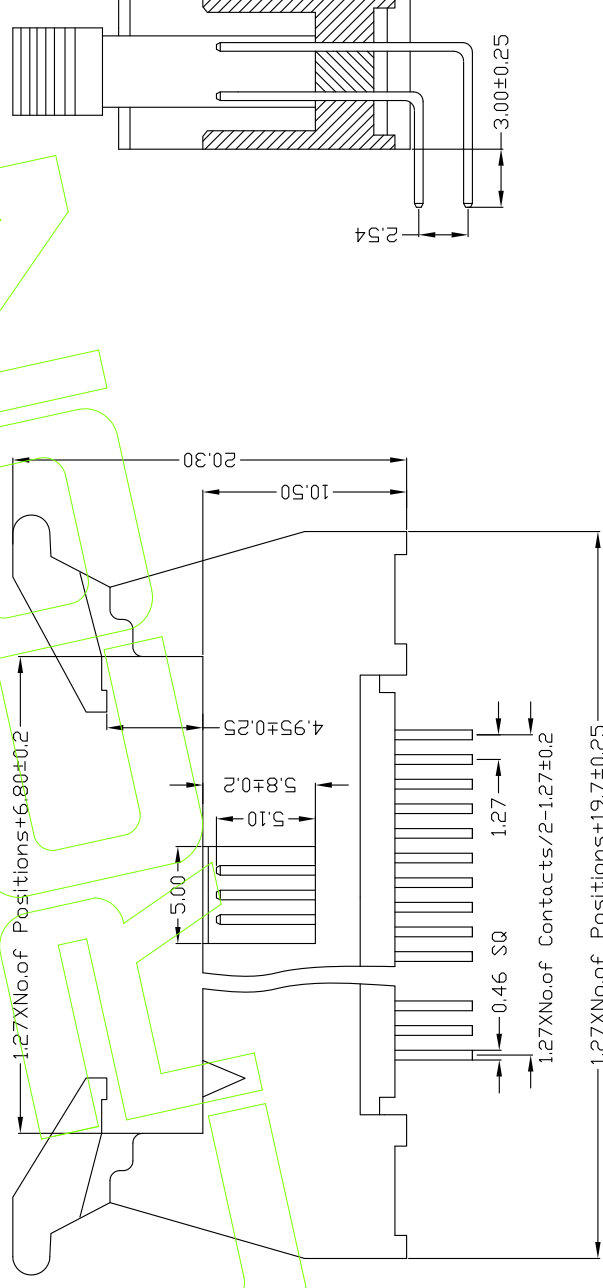[illegible]