

HSF RoHS

## 1. 材料(MATERIAL)

## 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.  
Housing: PA6T+30%G.F. UL94V-0, Color: Black

四方针：黄铜

電話: 0471-221161  
Contact: Bro

2 特性 (characteristics):

2. 特性 (Characteristics):  
额定电压: 1 AMP

额定电流: 1 AMP  
Rating Current: 1 AMP

Rating Current: 1 AMP.  
 规格四号 20-2 MAY

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M $\Omega$  min.

Insulating Resistance: 1000 M $\Omega$  min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ 


## Ordering Information

4E03S-1 XXX XX X X X 1  $\Delta_{AT}$ 

| No. of Pins | Contact       | Plating | Insulator         | Color     | Packing              |
|-------------|---------------|---------|-------------------|-----------|----------------------|
| 6           | Gold          | Flash   | Material: B-Black | A: PE Bag |                      |
| 6           | 1u Gold       |         | B: PA6T           | G: Grey   | B: Tape & Reel + CAP |
|             | 2u Gold       |         | C: PA9T           | W: White  | E: Tray              |
|             | 3u Gold       |         | D: LCP            |           |                      |
|             | 10u Gold      |         |                   |           |                      |
|             | 15u Gold      |         |                   |           |                      |
|             | 30u Gold      |         |                   |           |                      |
|             | Gold Flash    |         |                   |           |                      |
|             | 1u Gold/Tin   |         |                   |           |                      |
|             | 3u Gold/Tin   |         |                   |           |                      |
|             | 5u Gold/Tin   |         |                   |           |                      |
|             | 10u Gold/Tin  |         |                   |           |                      |
|             | 15u Gold/Tin  |         |                   |           |                      |
|             | 30u Gold/Tin  |         |                   |           |                      |
|             | Sn/Tin        |         |                   |           |                      |
|             | Sn/ Matte Tin |         |                   |           |                      |

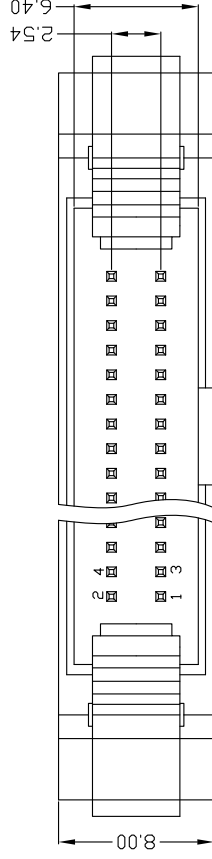

Recommended P. C. B layout

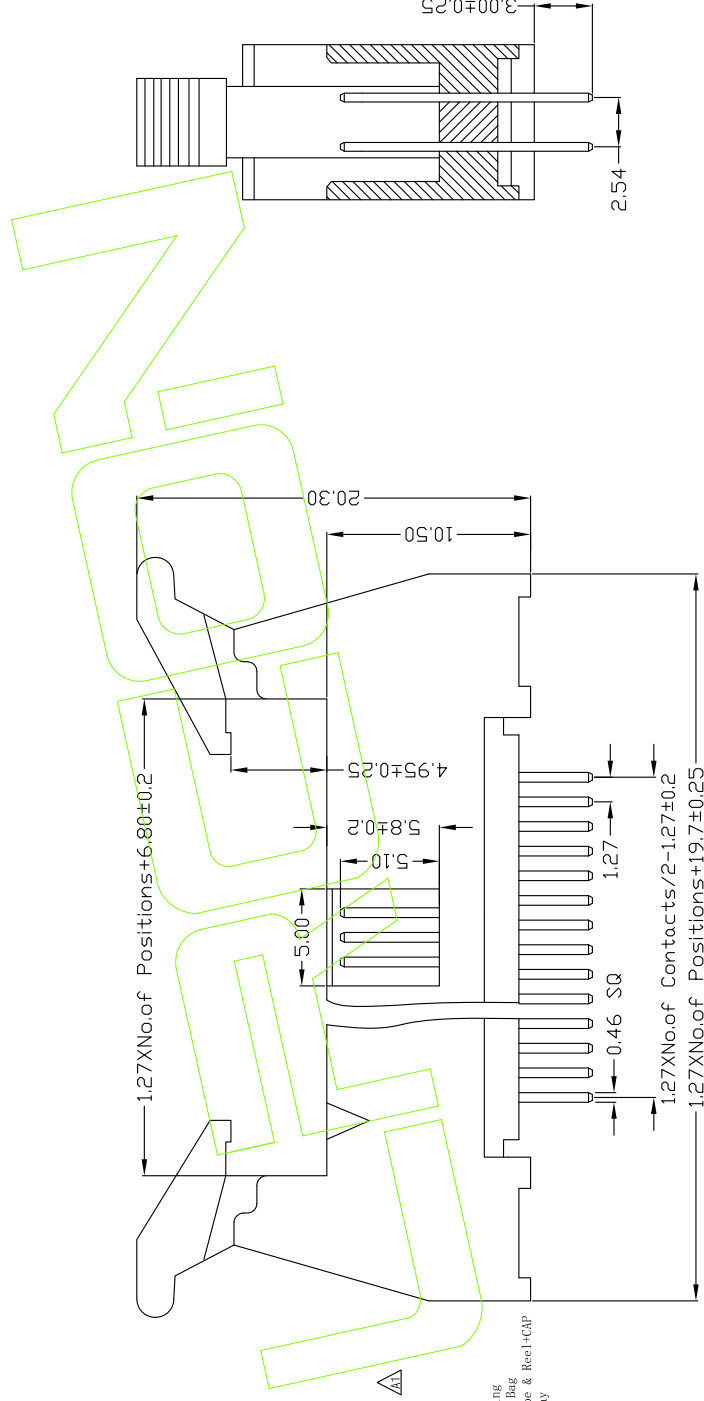[illegible]